



FALL SAFE®

PRODUCT CATALOGUE

2020/2021

FALL SAFE CATALOGUE 2020/2021

THERE ARE NO EXCUSES. IT'S YOUR WORK, IT'S OUR SOLUTION.

We could go on and on, but that truly is what our team looks after when designing a product. That's why before you start, we would like to give you some inputs:

You will find the icon index, size chart and color chart in the flap at the end of the catalogue. Not every size or connector combination is presented, but you can always contact us for more information. Always read carefully the product general and specific instruction manual before using any of FALL SAFE® products.

If you would like to give us your feedback, feel free to do so. We will be very happy to hear from you!
support@fallsafe-online.com

OUR HARDWARE

BASIC



Buckles standard
manual steel
9 kN



D-Rings forged
steel
22 kN

BASIC COMFORT



Buckles deluxe
automatic black
finished
9 kN



D-Rings forged
steel
22 kN

PROFESSIONAL



Buckles IZY automatic
black anodized forged
aluminium
9 kN



D-Rings black
anodized forged
aluminium
22 kN

OUR SOFTWARE

NEW CROC™ PADDING 2.0



Direct airflow system
Lightweight
Ergonomic support at pressure points
Integrated reflective

THREADS AND STITCHES




Double heavy duty stitch
High tenacity polyester thread
grade 10 (180N)
Both PRO and BASIC range

WEBBING




PROFESSIONAL
Water repellent webbing
- Abrasion and moisture
resistant. PES > 32 kN.
Heavy duty 44 mm



BASIC
Easy orientation - Black
and orange webbing.
PES > 28 kN.
Medium duty 45 mm



KEVLAR® NOMEX®
Webbing for high
temperature, high
strength. PES > 35 kN
Heavy duty 45 mm



BIOTHANE®
Coated webbing for
heavy duty applications.
PES > 35 kN
Heavy duty 45 mm



ATEX
Suitable for explosive
atmospheres. PES/carbon
> 26 kN
Heavy duty 45 mm

TABLE OF CONTENTS

OUR COMPANY
02 ABOUT US
SERVICES
04 FALL SAFE TRAINING®
05 FALL SAFE INSPECTOR®
06 LIFELINE SYSTEMS
PRODUCTS
07 HARNESSES
25 FALL PROTECTION CLOTHES
31 ACCESSORIES
35 WORK POSITIONING LANYARDS
39 LANYARDS
53 CONNECTORS
59 DESCENDERS
61 ROPE CLAMPS AND ROPE GRABS
63 PULLEYS
65 ANCHORAGES
71 ANCHOR LINES
75 GLOVES AND HELMETS
79 ROPES
83 CARRYING BAGS
87 RESCUE
95 FALL ARREST BLOCKS
99 APPAREL

YOUR WORK OUR SOLUTION

ABOUT US

Quality. Efficiency. Comfort. Social awareness.

Those are the principles that define us. Since the beginning, we are oriented to the development and production of innovative and excellent products.

We want to be recognized in the world market by users of safety and personal protection equipment, for the quality, safety, comfort of our products and offer technological solutions that generate value for the user.

Therefore, FALL SAFE® isn't just a PPE manufacture company.

We invest in people, technology and services with the trademark FALL SAFE®, FALL SAFE TRAINING® and FALL SAFE INSPECTOR®.

WHERE TO FIND US



HEADQUARTERS
VENDORS





You have known us for more than a decade and we are sure you can recognize our logotype as well as we do. But, as you probably know too, we like to "shake things up"!

From now on, you may find this monogram in our newsletters, catalogues and products.

But we are still FALL SAFE® and we will be using our original logotype too. It won't change anything on the product or our communication, much less in our brand.

DESIGN & INVESTIGATION

FALL SAFE® is an internationally certified company on the standards ISO9001:2015 and EU Regulation 2016/425.

We are aware of what our products stand for on the everyday of workers, using well defined and structured both productive and administrative processes on our quality manual.

Due to its geographical location, FALL SAFE® relies on support given by third party entities, with technological purposes, cooperating in the development of new products, and improving production processes. FALL SAFE® has been continuously improving all its machinery and applied technologies, investing in greater quality control.

QUALITY TESTS

FALL SAFE® products follow a rigorous process before being made available to the customer. Likewise, that process is based on many years of expertise, field investigation, stringent guidelines and high quality demands.

We take great care when selecting high quality raw-material. Our Quality Control Laboratory tests a wide range of materials, products and components to support FALL SAFE® quality requirements using modern testing machines.

The quality testing laboratories test to international and other recognized fall protection standards.



DROP TEST TOWER

At FALL SAFE® we want to be recognized for our highest-quality, before anything else.

That's what our customers and partners expect from us, and we go out of our way to deliver it.

This includes not only how we develop our products, but also how we manufacture and release them to our customers. Our process always include an exhaustive battery of tests and rigorous inspection processes to ensure our products exceed EN – European standards and ANSI/OSHA – American Standards. To achieve that, we use a drop test tower, which is located at our state-of-the-art test center.



CUSTOMER SERVICE MANAGING RELATIONSHIPS

We're committed to ensure that our products and services meet your expectations.

We are delighted to hear when we are doing well, but we also need to know what we can do better. If you would like to compliment us or have a suggestion on how we can improve, we want to know. If we make a mistake, or our service does not meet your expectations, we want to know.

Our team is always happy to hear from you and will always do the best they can to serve you better each time.



FALL SAFE TRAINING®

OPTIMAL TRAINING CONDITIONS

We are proud to say our training center is based on the principles of working at heights. It can easily respond to the demands of everyday's work through simulation areas.

The space was built around a 8 meter high structure, a confined space and a 7 meter high tower. With all the necessary equipment, all the environment was designed for training courses such as access to structures or rope access, access to confined spaces and access to telecommunication towers.

Training is an investment with benefits not only for the workers but also for employers. That is why we have been developing a wide range of training courses with the aim of providing each attendant involved with the practical and theoretical knowledge needed to perform their work safely.



TRAINING CATALOGUE

A training program is an instrument that aims at improving employee skills, which will enable the company to meet its objectives and establish more ambitious ones.

Contact us if you need a program with specific contents adapted to your organization or check out our catalogue training courses and choose the one that fits your needs:

FALL SAFE® Competent Person

Learn the current periodic examination requirements, recommendations and instructions issued by manufacturers applicable to PPE against falls from a height.

Metallic Structures

Learn and train the appropriate manoeuvres to safely access and work in metallic structures.

Telecommunication Towers

Learn how to use PPE in a safe manner and deal with the access and rescue from towers and other tall structures.

Confined Spaces

Learn how to act safely when accessing a confined space, that can reveal itself extremely dangerous and even deadly.

Rope Access

Learn how to descend, ascend and traverse ropes in order to access and work in pure suspension.

Work and Rescue in Wind Turbines

The contents of this training is directed to learn safe procedures when working in wind turbines where the aim is to apply the first response procedures in an emergency.

Roof Work

Learn safe working practices on roofs and how to make safe anchor points.

FALL SAFE® Competent Seller

Increase your competency and improve your after sales service.



THE NEW PPE MANAGEMENT APP BY FALL SAFE®

OUR SOLUTION

Aware of the increasingly rigorous regulations on the personal protective equipment use, management and maintenance, FALL SAFE® developed a new and unique PPE app.

FALL SAFE INSPECTOR® truly goes beyond everything just to give its user better functionalities and management options. More complete than ever, INSPECTOR® is now not only an app for the inspector, but a system for anyone using, inspecting, maintaining or even purchasing PPE. Following the new PPE Regulation (EU) 2016/425, we decided we would allow the system to be a must have when it comes to tracking the PPE.

AVAILABLE FOR



THE 3 MANAGEMENT MODULES:

ICHECK

If you are an inspector we have specially designed INSPECTOR® ICHECK for you. Besides allowing you to inspect the equipment with preloaded checklists, the app shows you all you have to know about your PPE.

ICONTROL

For the distributor, we developed INSPECTOR® ICONTROL, a document management system, giving you access to all the invoices, customers, purchases and sales, PPE in warehouse and a lot of other possibilities.

IGEST

If you are a health and safety technician or engineer, if you bought equipment or if you simply need to keep your PPE on track, INSPECTOR® IGEST is the right for you, allowing you to do all of it.

DISCOVER INSPECTOR®


FALL SAFE INSPECTOR® is available for iOS, Android and through a link. While IGest and IControl give the user the background on every product he owns, ICHECK allows mobility while performing an inspection.

Document Management modules that work via link can be integrated with the app for your smartphone.

HOW DOES ICHECK WORKS?

1 - Read the RFID on your FALL SAFE® PPE using your smartphone.

2 - Proceed to inspect the equipment, schedule an inspection, search more about that PPE (documentation, reports) or simply update information.

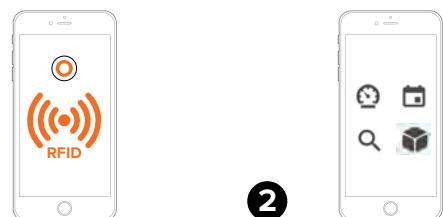

Some FALL SAFE® equipment don't have RFID, for example our BASIC range. This allows us to maintain an attractive price for the customer. In this case, our PPE has a QR Code, that can as well be read.

If you have equipment from another brand, you can simply register it by the serial number, manually, and proceed as usual.




LIFELINE SYSTEMS



SUPPLY, INSTALLATION, CERTIFICATION AND INSPECTION OF LIFELINES

In order to complement the offer of safety equipment for work at height, FALL SAFE® integrates an engineering department dedicated to the supply, installation, certification and inspection of lifelines and anchor points.

We have horizontal and vertical lifeline options in stainless steel cable and aluminum rail covering every possible scenario.

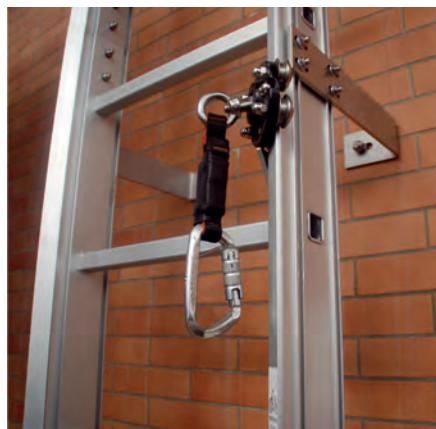

AUTHORIZED INSTALLERS, TECHNICIANS, TRAINERS AND INSPECTORS

At FALL SAFE® we have a team of certified technicians to install, maintain and certify lifelines. This way, we are able to present a complete solution to our customer and guarantee support in any situation.

In addition to the supply, installation, certification and inspection of lifelines, we are able to provide our customer with training in the use and maintenance of the equipment.



FALL SAFE® GUARANTEED QUALITY

We are able to guarantee the quality of our lifeline services thanks to our ISO9001:2015 certified Quality System.

FALL SAFE® can assure the quality of every service provided to the customer.



SHARNESS

FS243.01

COMBO 1

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	2,0 KG	2,1 KG	2,2 KG
EAN	5605423571172	560542351080	5605423820188

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	Dorsal D-ring attachment point Standing chest D-ring attachment point 2 lateral D-rings attachment points Ventral D-ring attachment point
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●
CE	EN358 EN361 EN813

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The Arachnida chest harness (FS243.04) with 4 arms for optimized upright body position and support for extended working hours at difficult access combined with the sit harness (FS243.03).



CROC 2.0

INNOVATION AIR FLOW





DIRECT AIRFLOW
STAY COOLER



REFLECTIVE
STAY VISIBLE



IZY BUCKLES
QUICK CONNECT



FS243.02 COMBO 2

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	1,9 KG	2,0 KG
EAN	5605423820355	5605423751215	5605423751222

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	Dorsal aluminium D-ring attachment point Standing chest D-ring attachment point 2 lateral D-rings attachments points Ventral D-ring attachment point
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN358
EN361
EN813

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The classic Araneae chest harness (FS243.05) with V-styling for all-round rope access and rescue activities combined with the sit harness (FS243.03).



FS243.03 SIT HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,2 KG	1,3 KG	1,4 KG
EAN	5605423571127	5605423820805	5605423751581

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	Ventral aluminium D-ring attachment point 2 lateral aluminium D-rings attachments points
BUCKLES	IZY Quick connect buckle
LOOPS	Ventral loop Gear loops at each side
USER WEIGHT	<140 KG

INTENSITY OF USE

● ● ●




EN358
EN813

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The sit harness divides the user weight evenly between the waist belt and the leg straps at suspended work for optimal comfort and control.

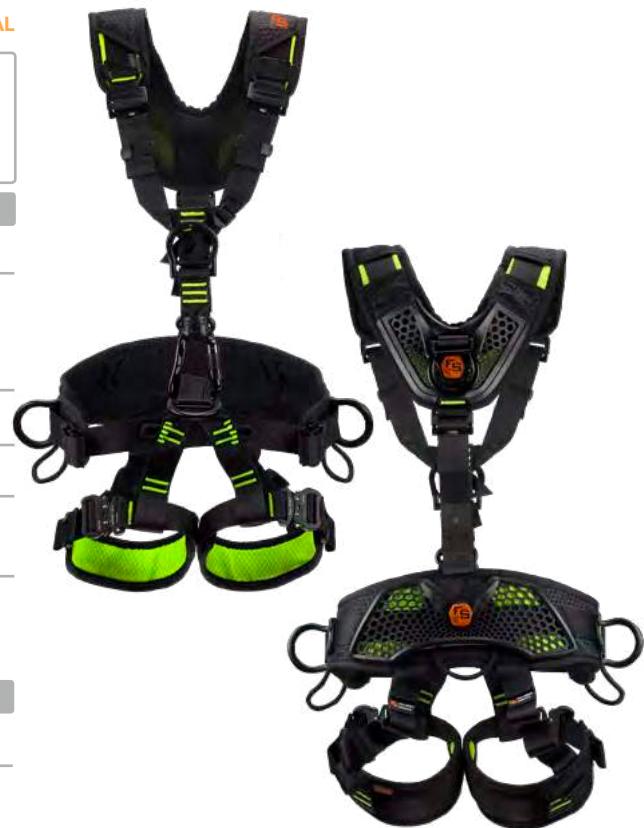

FS243.04

ARACHNIDA - CHEST

PROFESSIONAL

OK!
FALL
ARREST

SIZE	S/M	L/XL	XXL
WEIGHT	0,7 KG	0,8 KG	0,9 KG
EAN	5605423751550	5605423751567	5605423751598

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	Dorsal aluminium D-ring attachment point Standing chest aluminium D-ring attachment point
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN361 w/ sit harness

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The Arachnida wrap around design with its characteristic 4 arms was designed to support the upper body without interfering with users movement. Fully adjustable, it can easily and safely be attached or detached to be used as a fully body harness.



FS243.05

ARANEEAE - CHEST

PROFESSIONAL

OK!
FALL
ARREST

SIZE	S/M	L/XL	XXL
WEIGHT	0,5 KG	0,6 KG	0,7 KG
EAN	5605423751604	5605423571134	5605423751611

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	Dorsal aluminium D-ring attachment point Standing chest aluminium D-ring attachment point
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN361 w/ sit harness

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The Araneeae chest harness with V-styling for all-round rope access and rescue activities.



FS243.06

EVO

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,2 KG	1,3 KG	1,4 KG
EAN	5605423800623	5605423800630	5605423800647

FEATURES

PADDING	Croc EVO 2.0 padding
	Dorsal aluminium D-ring attachment point
O-RINGS	Chest O-ring attachment point
D-RINGS	2 lateral O-rings attachments points
	Ventral D-ring attachment point
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●

CE

EN358
EN813
EN361

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

With 12 adjustment points including unique ventral and vertical legs extension adjustment and O-Rings instead of the usual D-Rings, the EVO comes from the evolution of the standard. FS243.06 has dense legs in order to allow more comfort when working, as well as an lightweight composition.

SIDE AND BACK
TOOL HOLDERS12
ADJUSTMENT
POINTS

FS242

LITE - HARNESS



SIZE	S/M	L/XL	XXL
WEIGHT	0,9 KG	1,0 KG	1,1 KG
EAN	5605423570809	5605423570816	5605423570823

FEATURES

PADDING	Croc 2.0 padding
BUCKLES	IZY Quick connect buckle
LOOPS	1 Dorsal loop 2 front loops for fall arrest
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN361

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The best selling ultra light harness, with low leg straps for improved comfort and light and breathable dorsal padding.



PROFESSIONAL



UNIQUE DESIGN



IMPACT ULTRA RESISTANT

FS202

CLASSIC - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,1 KG	1,2 KG	1,3 KG
EAN	5605423751383	5605423570014	5605423570021

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN361

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The classic harness with proven comfort and strength.



FS221

ROOFWALKER - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	2,2 KG	2,3 KG	2,4 KG
EAN	5605423570861	5605423570083	5605423570885

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring 2 side D-rings for work positioning
BUCKLES	IZY Quick connect buckle
LOOPS	2 front loops for fall arrest
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●
CE	EN361 EN355

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The unique tech harness for roof work, with integrated energy absorber.



FS222

ULTRA - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,4 KG	1,5 KG	1,6 KG
EAN	5605423570090	5605423570106	5605423570113


FEATURES

PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring 2 Side D- Rings for work positioning
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●
CE	EN361 EN358

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The classic harness with integrated 3D support belt.

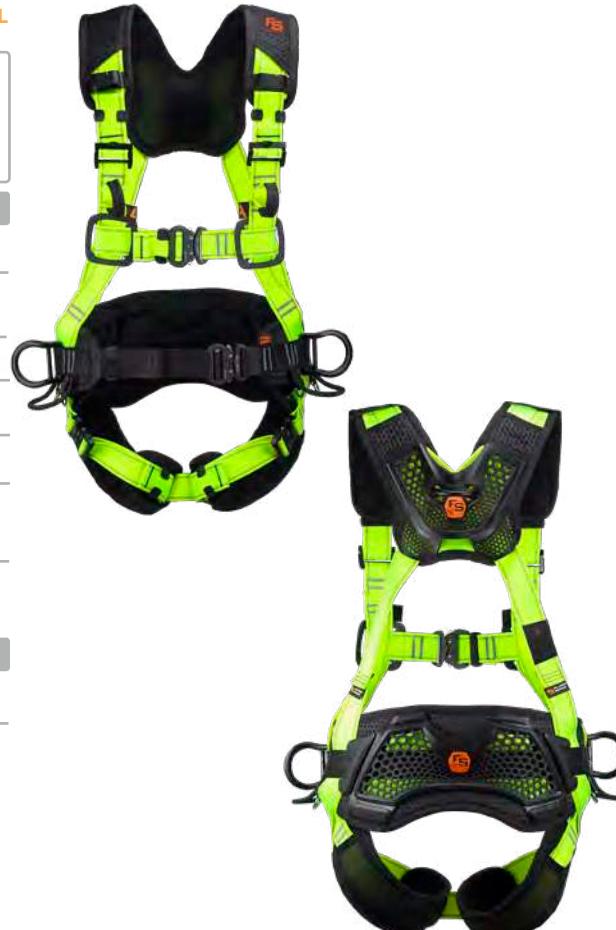

FS224

SCAFFOLDER - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,5 KG	1,6 KG	1,7 KG
EAN	5605423570120	5605423570137	5605423570144

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring 1 chest D-ring for fall arrest systems
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●



EN361

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent, Low positioned leg straps, wide padded sit strap

The harness developed especially for the scaffolders.



FS227

ENERGY - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,9 KG	2,0 KG	2,1 KG
EAN	5605423570236	5605423570229	5605423570243

FEATURES


PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring 1 Chest D-ring for fall arrest 1 Ventral D-ring for sit harness, rope access 2 side D-rings for work positioning
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●

EN358
EN361
EN813

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES HP Water Repellent

The heavy duty rope access harness.

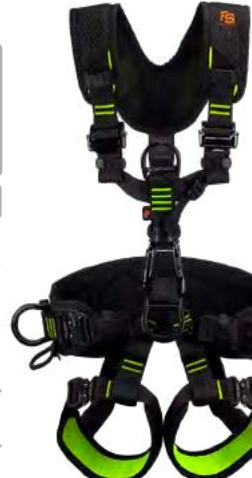

FS240-2

ARC FLASH - HARNESS

PROFESSIONAL

OK!
FALL
ARREST

SIZE	S/M	L/XL	XXL
WEIGHT	2,2 KG	2,3 KG	2,4 KG
EAN	5605423571301	5605423571318	5605423571325

FEATURES

PADDING	Croc 2.0 padding
D-RINGS	1 Dorsal D-ring 2 side D-rings for work positioning
LOOPS	2 front loops for fall arrest
BUCKLES	Dielectric quick buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●
CE	EN358 EN361 EN813 ASTM F887 (ARC FLASH TEST)

MATERIAL

METAL PARTS	Aluminium
WEBBING	KEVLAR®/NOMEX® Heat resistant webbing

The harness to be used when high voltage electricity is a concern.



FS233

TUFF - HARNESS

PROFESSIONAL

OK!
FALL
ARREST

SIZE	S/M	L/XL	XXL
WEIGHT	1,0 KG	1,2 KG	1,3 KG
EAN	5605423571271	5605423571264	5605423571288

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring 1 Chest D-ring for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	● ● ●
CE	EN361

MATERIAL

METAL PARTS	Buckles in steel, D-Ring in aluminium
WEBBING	POLYESTER/BIOTHANE® resistant webbing

The harness specially designed to resist very tough and dirty environments.



FS249

ATEX HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	1,4 KG	1,5 KG	1,6 KG
EAN	5605423571332	5605423571295	5605423571349

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>
CE	EN361 EN60079-0 (II 2 G c T6)

MATERIAL

METAL PARTS	Aluminium
WEBBING	PES anti-static webbing

The harness to be used when there is explosive atmosphere.



FS201KEV

WELDER - HARNESS

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	0,9 KG	1,0 KG	1,1 KG
EAN	5605423821116	5605423820256	5605423270419

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring
LOOPS	2 front loops for fall arrest
BUCKLES	Standard inox buckle
USER WEIGHT	<140 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>
CE	EN361

MATERIAL

METAL PARTS	Buckles in steel, D-Ring in aluminium
WEBBING	KEVLAR®/NOMEX® heat resistant webbing

The harness specially designed for welders and workers that are exposed to flame, fire and associated welding processes.



FS2000

BERKUT 1 - HARNESS

BASIC



OK!
FALL
ARREST



SIZE	UNIVERSAL
WEIGHT	1,2 KG
EAN	5605423660050

FEATURES

PADDING	Basic padding
D-RINGS	1 Dorsal D-ring 2 Side D-ring for work positioning
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Standard buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input checked="" type="radio"/> <input type="radio"/>
CE	EN358 EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2007

AQUILA 3 - HARNESS

BASIC



OK!
FALL
ARREST



SIZE	UNIVERSAL
WEIGHT	0,7 KG
EAN	5605423660074

FEATURES

PADDING	Basic padding
D-RINGS	1 Dorsal D-ring 2 Side D-ring for work positioning
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Standard buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input checked="" type="radio"/> <input type="radio"/>
CE	EN358 EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2010

BERKUT 3 - HARNESS

BASIC COMFORT



SIZE	S/M	L/XL	XXL
WEIGHT	2,4 KG	2,5 KG	2,6 KG
EAN	5605423660319	5605423660197	5605423660210

FEATURES

PADDING	Basic padding
D-RINGS	1 dorsal D-ring and 1 front D-ring for fall arrest systems 2 side D-rings for work positioning 1 ventral D-ring for work suspension
BUCKLES	Standard buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input checked="" type="radio"/> <input type="radio"/>

CE
EN358
EN361
EN813

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2018

AQUILA 5 - HARNESS

BASIC COMFORT



SIZE	UNIVERSAL
WEIGHT	1,3 KG
EAN	5605423752397

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Quick deluxe buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input checked="" type="radio"/> <input type="radio"/>

CE
EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2019

AQUILA 6 - HARNESS

OK!
FALL
ARREST

SIZE	UNIVERSAL
WEIGHT	1,3 KG
EAN	5605423752380

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring 1 Chest D-ring for attachment of fall arrest systems
BUCKLES	Quick deluxe buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>



EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



BASIC COMFORT



FS2020

BERKUT 4 - HARNESS

BASIC COMFORT

OK!
FALL
ARREST

SIZE	S/M	L/XL	XXL
WEIGHT	2,2 KG	2,3 KG	2,4 KG
EAN	5605423752403	5605423752410	5605423754087

FEATURES

PADDING	Basic padding
D-RINGS	1 dorsal D-ring 2 Cranked side waist D-rings for work positioning, with free rotation 2 Side waist D-rings cranked and freely rotatable for work positioning
LOOPS	2 Front loops for attachment of fall arrest systems

BUCKLES	Quick deluxe buckle
---------	---------------------

USER WEIGHT	<120 KG
-------------	---------

INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>
------------------	--

CE	EN358 EN361
----	----------------

MATERIAL

METAL PARTS	Steel
-------------	-------

WEBBING	Basic orange/black
---------	--------------------



FS2025

BERKUT 5 - HARNESS

BASIC COMFORT



SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	1,9 KG	2,0 KG
EAN	5605423270853	5605423270808	5605423270860

FEATURES

PADDING	Basic padding
D-RINGS	1 dorsal D-Ring
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Quick deluxe buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>
CE	EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2026

BERKUT 6 - HARNESS

BASIC COMFORT



SIZE	S/M	L/XL	XXL
WEIGHT	2,4 KG	2,5 KG	2,6 KG
EAN	5605423270877	5605423270815	5605423270884

FEATURES

PADDING	Basic padding
D-RINGS	1 Dorsal D-ring 2 Side D-rings for work positioning
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Quick deluxe buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>
CE	EN358 EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2001

BERKUT 5 - HARNESS

BASIC



OK!
FALL
ARREST



SIZE	UNIVERSAL
WEIGHT	0,7 KG
EAN	5605423660005

FEATURES

PADDING	No padding
D-RINGS	1 dorsal D-Ring
BUCKLES	Standard buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>



EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2002

AQUILA 3 - HARNESS

BASIC



OK!
FALL
ARREST



SIZE	UNIVERSAL
WEIGHT	0,7 KG
EAN	5605423660104

FEATURES

PADDING	Basic padding
D-RINGS	1 dorsal D-ring
LOOPS	2 Front loops for attachment of fall arrest systems
BUCKLES	Standard buckle
USER WEIGHT	<120 KG
INTENSITY OF USE	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/>



EN361

MATERIAL

METAL PARTS	Steel
WEBBING	Basic orange/black



FS2006

AQUILA 2 - HARNESS

BASIC



SIZE UNIVERSAL

WEIGHT 1,2 KG

EAN 5605423660081

FEATURES

PADDING No padding

D-RINGS 1 dorsal D-ring
1 chest D-ring for attachment of fall arrest systems

BUCKLES Standard buckle

USER WEIGHT <120 KG

INTENSITY OF USE

CE EN361

MATERIAL

METAL PARTS Steel

WEBBING Basic orange/black



FS2008

AQUILA 4 - HARNESS

BASIC



SIZE UNIVERSAL

WEIGHT 0,7 KG

EAN 5605423660067

FEATURES

PADDING Basic padding

D-RINGS 1 dorsal D-ring

LOOPS 2 Front loops for attachment of fall arrest systems

BUCKLES Standard buckle

USER WEIGHT <120 KG

INTENSITY OF USE

CE EN361

MATERIAL

METAL PARTS Steel

WEBBING Basic orange/black





**FALL PROTECTION
CLOTHES**

FS320-30

SMART - FALL PROTECTION VEST

PROFESSIONAL



FALL ARREST



SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	1,9 KG	2,0 KG
EAN	5605423100426	5605423100433	5605423101751

- Integrated safety harness
- 2 pocket with velcro closure

FEATURES

D-RINGS	1 Dorsal D-ring
	2 Side D-rings for work positioning
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG

CE	EN361	EN358
	EN471	

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

AVAILABLE COLOURS	
-------------------	--



FS322-30**SMART - FALL PROTECTION VEST****PROFESSIONAL**

SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	1,9 KG	2,0 KG
EAN	5605423101003	5605423100983	5605423100990

- Integrated safety harness
- 2 pocket with velcro closure

FEATURES

D-RINGS	1 Dorsal D-ring
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
CE	EN361 EN471

MATERIAL

METAL PARTS	Aluminium
AVAILABLE COLOURS	

**FS301-30****SMART - FALL PROTECTION VEST****PROFESSIONAL**

SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	1,9 KG	2,0 KG
EAN	5605423800654	5605423800661	5605423800678

- Integrated safety harness
- 2 pocket with velcro closure

FEATURES

D-RINGS	1 Dorsal D-ring 2 Side D-rings for work positioning
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
CE	EN361 EN358 EN471

MATERIAL

METAL PARTS	Aluminium
AVAILABLE COLOURS	



FS3610-40

OFFSHORE VEST

PROFESSIONAL



OK!

FALL ARREST



4 POINT ADJUST



EXTREME CONDITIONS



FIRE

SIZE	S/M	L/XL	XXL
WEIGHT	1,8 KG	2,0 KG	3,0 KG
EAN	5605423800685	5605423380002	5605423800692

- Integrated safety harness and inflatable life jacket
- 2 pocket with velcro closure
- Anti-flame 100% cotton fabric

FEATURES

D-RINGS	1 Dorsal D-ring 2 Side D-rings for work positioning
---------	--

BUCKLES	Standard buckle
---------	-----------------

USER WEIGHT	<140 KG
-------------	---------

CE	EN361 EN358 ISO12402
----	----------------------------

MATERIAL

METAL PARTS	Aluminium
-------------	-----------



FS400-55**PANZER - FALL PROTECTION COVERALL****PROFESSIONAL**

SIZE	S	M	L	XL
WEIGHT	1,8 KG	1,9 KG	2,0 KG	2,1 KG
EAN	5605423800708	5605423800715	5605423800722	5605423800739

- Integrated safety harness
- Large pockets - chest, front and back

FEATURES

D-RINGS	1 Dorsal D-ring 1 Front D-ring
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG



EN361

MATERIAL

METAL PARTS	Aluminium
FABRIC	35% cotton, 65% polyester
AVAILABLE COLOURS	



DORSAL ALUMINIUM D-RING

FS402-55**RESCUE - FALL PROTECTION COVERALL****PROFESSIONAL**

SIZE	S	M	L	XL
WEIGHT	1,8 KG	1,9 KG	2,0 KG	2,1 KG
EAN	5605423800746	5605423800753	5605423800760	5605423800777

- Integrated safety harness
- Large pockets - chest, front and back

FEATURES

D-RINGS	1 Dorsal D-ring 1 Front D-ring 2 shoulders D-rings for rescue
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG

EN361
EN1497**MATERIAL**

METAL PARTS	Aluminium
FABRIC	35% cotton, 65% polyester
AVAILABLE COLOURS	



SHOULDER RESCUE D-RINGS

FS4242-30

BLASTER - FALL PROTECTION JACKET

PROFESSIONAL



SIZE	S/M	L/XL	XXL
WEIGHT	2,4 KG	2,5 KG	2,6 KG
EAN	5605423800784	5605423800791	5605423800807

- Sports jacket style that moves with you
- Integrated safety harness
- High resistance fabric
- Pockets with zipper to hide loops when not in use

FEATURES

D-RINGS	1 Dorsal D-ring 2 Side D-rings
LOOPS	2 Front loops for fall arrest
BUCKLES	IZY Quick connect buckle
USER WEIGHT	<140 KG
CE	EN361 EN358

MATERIAL

METAL PARTS	Aluminium
AVAILABLE COLOURS	



VEST AND JACKET ACCESSORY

FS8022

WORK BELT

PROFESSIONAL

REF.	FS8022
EAN	5605423800616

- Easy connection to the vest or jacket through pressure buttons
- Various pockets and available spaces for all sort of tools
- Can be used alone, with a belt

FEATURES

WEIGHT	0,9 KG
SWL	3 KG



SWISS
ACCESSORIES



FS8050/FS8051**CLAW - VENTRAL ROPE CLAMP**

PROFESSIONAL

- Easy to install for ascending ropes
- Can be attached easily to the chest and ventral connector
- Compatible with harness: FS227, FS243, FS2010

FEATURES

MATERIAL Aluminium

WEIGHT 0,1 KG

CE EN567
EN12841-B

REF.	FS8050	FS8051
EAN	5605423820294	5605423802115

**FS2052****SERRIO - SEAT**

PROFESSIONAL

- Provides more comfort when suspended from the harness
- Use with our technical harnesses with ventral attachment
- Manufactured with zipper that allows removing the rigid component for easier cleaning/replacement
- Wide seating area ensures good stability and allows comfortable hanging

FEATURES

LOOPS 3 loops for gear or material suspension

WEIGHT 1,2 KG



REF.	FS2052
EAN	5605423570458

**FS8015****TOOLS LANYARD**

PROFESSIONAL

- Designed to prevent injury, damage or lose productivity from dropped tools
- Maximum safe work capacity of 3kg

FEATURES

WEIGHT 0,1 KG

SWL 3 KG



REF.	FS8015
EAN	5605423452310



FS8017**HEAVY DUTY - TOOLS LANYARD****PROFESSIONAL**

REF. FS8017

EAN 5605423550115

- Designed to prevent injury, damage or lose productivity from dropped tools
- Maximum safe work capacity of 5kg

FEATURES

WEIGHT 0,1 KG

SWL 3 KG

**FS8016****LIGHT TOOL LANYARD****PROFESSIONAL**

REF. FS8016


EAN 5605423550108

- Holds and guards tools to help worker prevent injury and damage from dropped tools
- Elastic cord with adjustable barrel lock for tool attachment
- Length 0,7-1,2m

FEATURES

WEIGHT 0,1 KG

SWL 2,3 KG

**FS8019****DRILL BAG****PROFESSIONAL**

REF. FS8019


EAN 5605423800562

- Velcro closure
- Maximum safe work capacity of 2,7kg
- Bag fits drill batteries up to approx. 8cm (H) x 15cm (L) x 8cm (W)

FEATURES

WEIGHT 0,2 KG

SWL 2,7 KG

**FS8021****TOOL TETHER****PROFESSIONAL**

REF. FS8021

EAN 5605423800579

- Size: 90mmx25mm
- Reduces risk of lost or damaged tools
- Designed for creating an attachment point for tool lanyards

FEATURES

WEIGHT 0,03 KG

SWL 3 KG



**FS800-SP1****SAFESTEP - SUSPENSION TRAUMA RELIEF STRAP**

PROFESSIONAL

- Avoids hang trauma after fall
- Easy to use and fits all leg lengths
- Recommended to use 2pcs per harness for stability

FEATURES

MATERIAL PES 20MM Black

WEIGHT 0,1 KG

EAN 5605423420210

**FS800-SP2****SAFESTEP DUO - SUSPENSION TRAUMA RELIEF STRAP**

PROFESSIONAL

- Avoids hang trauma after fall
- Easy to use and fits all leg lengths
- Easy to install on any harness
- Unique design, quick connect buckle

FEATURES

MATERIAL PES 20MM Black

WEIGHT 0,1 KG

EAN 5605423270235

**FS800-SP3****TAPE - FOOT LOOP**

PROFESSIONAL

- Elastic keeps foot in loop
- Compatible with FS33330/FS3331
- Quick and easy adjusting of foot loop length

FEATURES

MATERIAL PES 20MM Black

WEIGHT 0,2 KG

EAN 5605423820720

**FS800-SP6****CORD - FOOT LOOP**

PROFESSIONAL

- Dyneema® cord and webbing for increased durability
- Elastic keeps foot in loop.
- Compatible with FS33330/FS3331
- Durable 8-ring alu buckle or adjusting foot loop length

FEATURES

MATERIAL Dyneema® cord and webbing

WEIGHT 0,1 KG

EAN 5605423270587





**WORK POSITIONING
LANYARDS**

FS052

ENDURO - WORK POSITIONING LANYARD

PROFESSIONAL



SIZE	2M	3M	4M
WEIGHT	0,7 KG	0,8 KG	0,9 KG
EAN	5605423300000	5605423300017	5605423300024

FEATURES

DESCRIPTION	<ul style="list-style-type: none"> Length adjuster, easy and light, one-hand operated Sewn ends protected by plastic sheath
-------------	---

USER WEIGHT	<100 KG
-------------	---------



EN358

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

ROPE	Professional 11mm kernmantel
------	------------------------------



FS053K

GRIPPA - WORK POSITIONING LANYARD

PROFESSIONAL



SIZE	2M	3M
WEIGHT	0,7 KG	0,8 KG
EAN	5605423259933	5605423300369

FEATURES

DESCRIPTION	<ul style="list-style-type: none"> Length adjuster Grippa in aluminium with ergo grip Sewn ends protected by plastic sheath
-------------	---

USER WEIGHT	<100 KG
-------------	---------

EN358
EN353-2

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

ROPE	Professional 11mm kernmantel
------	------------------------------



FS054

LITE - WORK POSITIONING LANYARD

PROFESSIONAL



SIZE	2M	3M	4M
WEIGHT	0,7 KG	0,8 KG	0,9 KG
EAN	5605423800814	5605423300109	5605423300116

FEATURES

DESCRIPTION	<ul style="list-style-type: none"> • 8-ring style length adjuster • Sewn ends protected by plastic sheath
USER WEIGHT	<100 KG

EN354
EN358

MATERIAL

METAL PARTS	Aluminium
ROPE	Professional 11mm kernmantel



FS083

MAX PRO - WORK POSITIONING LANYARD

PROFESSIONAL



SIZE	2M	3M	4M
WEIGHT	0,7 KG	0,8 KG	0,9 KG
EAN	5605423803648	5605423803952	5605423803969

FEATURES

DESCRIPTION	<ul style="list-style-type: none"> • MAX PRO length adjuster, easy adjust, one-hand operated • Sewn ends protected by plastic sheath
USER WEIGHT	<100 KG



EN358

MATERIAL

METAL PARTS	Aluminium
ROPE	Professional 11mm kernmantel





FS052H

WORK POSITIONING LANYARD

BASIC

SIZE	2M	3M	4M
WEIGHT	0,7 KG	0,8 KG	0,9 KG
EAN	5605423300277	5605423300260	5605423300253

FEATURES

DESCRIPTION

- Easy and quick to use with one hand operated length adjuster
- Length adjuster device with precise length adjustment in steel
- Connectors comply with EN362 standard
- Use with a belt as EN358 standard

USER WEIGHT

<100 KG



EN358

MATERIAL

METAL PARTS Steel

ROPE Basic 14mm polyester



POSITIONING BELTS

FS242-B

LITE - POSITIONING BELT



PROFESSIONAL



EN358

- 2 side D-rings for work positioning
- Adjustable Buckle
- Air flow through breathable materials
- Ergonomic design
- Compatible with LITE FS242

FS090

ASTUR - POSITIONING BELT



BASIC



EN358

- 2 side D-rings for work positioning
- Size adjustment at waist strap
- Compatible with basic harnesses FS2001, FS2002, FS2006, FS2008, FS2019, FS2018

LANYARDS



FS503

SHOXX - ENERGY ABSORBER

PROFESSIONAL



WEIGHT	0,530 KG
EAN	5605423360073

- 44 mm webbing energy absorber
- Maximum extension 175 cm
- Extra durable protective pouch

FEATURES

USER WEIGHT	<100 KG
-------------	---------

CE	EN355
----	-------

MATERIAL

WEBBING	Energy Absorber SHOXX Polyester 44mm
---------	--------------------------------------



FS080

CANYARO - LANYARD

PROFESSIONAL



SIZE	Short leg 0,30M Long leg 0,65M
WEIGHT	0,121 KG
EAN	5605423820638

FEATURES

USER WEIGHT	<100 KG
-------------	---------

CE	EN354
----	-------

MATERIAL

ROPE	Mamba Negra rope 11mm
------	-----------------------



FS082

FIXO - NON ADJUSTABLE
LANYARD

PROFESSIONAL



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,167 KG	0,251 KG	0,334 KG
EAN	5605423730470	5605423730456	5605423730494

FEATURES

USER WEIGHT	<100 KG
-------------	---------

+ AVAILABLE SIZES	0.5M; 3M; 4M; 5M
----------------------	------------------

NOTE	Fixo lanyard do not have energy absorbers and should only be used for work positioning/restraint system
------	---

CE	EN354
----	-------

MATERIAL

ROPE	Kernmantel static rope 11mm
------	-----------------------------



FS504-AB**STRETX - LANYARD WITH ENERGY ABSORBER**

PROFESSIONAL



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,921 KG	1,382 KG	1,842 KG
EAN	5605423361865	5605423360585	5605423360578

- 43mm stretchable webbing reduce trip hazard
- Shoxx energy absorber pack limits impact force below 6kN

FEATURES

USER WEIGHT <100 KG

EN355
EN354**MATERIAL**

METAL PARTS Aluminium

WEBBING Professional 43 mm stretchable polyester

**FS505-AB****STRETX - LANYARD WITH ENERGY ABSORBER**

PROFESSIONAL



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	1,400 KG	2,100 KG	2,800 KG
EAN	5605423360837	5605423360660	5605423360653

- 40 mm stretchable webbing reduce trip hazard
- Y-leg lanyard
- Shoxx energy absorber pack limits impact force below 6 kN

FEATURES

USER WEIGHT <100 KG

EN355
EN354**MATERIAL**

METAL PARTS Aluminium

WEBBING Professional 43 mm stretchable polyester

**AVAILABLE CONNECTORS**

Connectors combinations for the lanyards. Availability and prices on request.





FS501R-AB

KORD - LANYARD WITH ENERGY ABSORBER

PROFESSIONAL

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,543 KG	1,002 KG	1,461 KG
EAN	5605423360615	5605423360547	5605423360592

- Shoxx energy absorber pack limits impact force below 6kN
- Heavy duty stitched ends

FEATURES

USER WEIGHT <100 KG

CE EN355
EN354

MATERIAL

METAL PARTS Aluminium

ROPE Professional 11mm Kernmantel



FS502R-AB

KORD - DOUBLE LANYARD WITH ENERGY ABSORBER

PROFESSIONAL

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	1,019 KG	1,717 KG	2,415 KG
EAN	5605423820836	5605423360769	5605423360776

- Sewn ends protected by plastic sheath
- Shoxx energy absorber
- Heavy duty stitched ends

FEATURES

USER WEIGHT <100 KG

CE EN355
EN354

MATERIAL

METAL PARTS Aluminium

ROPE Professional 43 mm stretchable polyester



FS501-AB**WEBB - ADJUSTABLE LANYARD
WITH ENERGY ABSORBER**

PROFESSIONAL



SIZE	1,4 M - 2,0 M
WEIGHT	0,39 KG
EAN	5605423360677

- Shoxx energy absorber pack limits impact force below 6kN
- 8-ring length adjuster

FEATURES

USER WEIGHT <100 KG

EN354
EN355**MATERIAL**

METAL PARTS Aluminium

WEBBING Heavy duty 25mm polyester

**FS502-AB****WEBB - DOUBLE LANYARD
WITH ENERGY ABSORBER**

PROFESSIONAL



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,31 KG	0,49 KG	0,60 KG
EAN	5605423751475	5605423360752	5605423360714

- Y-leg lanyard
- Shoxx energy absorber pack limits impact force below 6kN

FEATURES

USER WEIGHT <100 KG

EN354
EN355**MATERIAL**

METAL PARTS Aluminium

WEBBING Heavy duty 25mm polyester



FS595-AB

STREAMLINE - LANYARD WITH ENERGY ABSORBER

PROFESSIONAL



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,475 KG	0,900 KG	1,800 KG
EAN	5605423701357	5605423700671	5605423700657

- 43mm stretchable tubular webbing > 25kN
- Integrated streamline energy absorber
- Shoxx streamline energy absorber limits impact force below 6kN

FEATURES

USER WEIGHT <100 KG

EN355
EN354

MATERIAL

METAL PARTS Aluminium

WEBBING Professional 43 mm stretchable polyester



FS596-AB

STREAMLINE - DOUBLE LANYARD WITH ENERGY ABSORBER

PROFESSIONAL



SIZE	1,0 M	1,5 M	1,75 M
WEIGHT	0,979 KG	1,656 KG	1,995 KG
EAN	5605423701333	5605423700718	5605423820249

- 43mm stretchable tubular webbing > 25kN
- Integrated streamline energy absorber
- Shoxx streamline energy absorber limits impact force below 6kN Max

FEATURES

USER WEIGHT <100 KG

EN355
EN354

MATERIAL

METAL PARTS Aluminium

WEBBING Professional 43 mm stretchable polyester



FS523R-CB**SHOXX 136 - LANYARD WITH ENERGY ABSORBER**

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	1,02 KG	1,07 KG	1,14 KG
EAN	5605423362183	5605423362190	5605423362206

- Shoxx 136 high load energy absorber limits impact force below 6kN
- Maximum extension of energy absorber 175cm
- Heavy duty stitched ends
- Body connector FS33562 double action hook
- Anchor connectors FS821 large double action hooks

FEATURES

USER WEIGHT	<136KG (TESTED)
-------------	-----------------



EN355
EN354
CNB/P/11.074 (EDGE TEST)

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

ROPE	Professional 12 mm Kernmantel
------	-------------------------------

**FS524R-CB****SHOXX 136 - DOUBLE LANYARD WITH ENERGY ABSORBER**

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	1,039 KG	1,747 KG	2,455 KG
EAN	5605423362213	5605423362220	5605423362237

- Y-leg lanyard
- Shoxx 136 high load energy absorber limits impact force below 6kN
- Heavy duty stitched ends
- Body connector FS33562 double action hook
- Anchor connectors FS821 large double action hooks

FEATURES

USER WEIGHT	<136KG (TESTED)
-------------	-----------------



EN355
EN354
CNB/P/11.074 (EDGE TEST)

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

ROPE	Professional 12 mm Kernmantel
------	-------------------------------



FS502KEV-AB

WELDER - DOUBLE LANYARD
WITH ENERGY ABSORBER

PROFESSIONAL



SIZE	2,0 M
WEIGHT	1,648 KG
EAN	5605423362107

- Shoxx energy absorber with flame retardant cover
- Specially designed for welders and workers that are exposed to flame, fire and associated welding processes

FEATURES

USER WEIGHT	<100 KG
-------------	---------

CE	EN355
	EN354

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

WEBBING	KEVLAR®/NOMEX® heat resistant webbing
---------	---------------------------------------



FS502ATEX

ATEX - DOUBLE LANYARD WITH
ENERGY ABSORBER

PROFESSIONAL



SIZE	2,0 M
WEIGHT	1,40 KG
EAN	5605423362176

- Polyester anti-static webbing
- Shoxx energy absorber with anti-static cover
- Designed for explosive atmospheres

FEATURES


USER WEIGHT	<100 KG
-------------	---------

CE	EN354
	EN355
	EN60079-0

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

WEBBING	PES anti-static
---------	-----------------



FS531-AB

TUFF - LANYARD WITH ENERGY ABSORBER

PROFESSIONAL



SIZE	1,5 M	2,0 M
WEIGHT	1,762 KG	2,474 KG
EAN	5605423600063	5605423600032

- Polyester/Biothane® webbing resists dirt, oil, paint and bacteria
- Easy to clean, webbing protected by a layer of PES Biothane®
- Shoxx energy absorber

FEATURES

USER WEIGHT	<100 KG
-------------	---------

EN355
EN354

MATERIAL

METAL PARTS	Aluminium
-------------	-----------

WEBBING	Polyester/Biothane®
---------	---------------------



FS525-QS

ARC FLASH - DOUBLE LANYARD WITH ENERGY ABSORBER

PROFESSIONAL



SIZE	2,0 M
WEIGHT	2,000 KG
EAN	5605423362244

- The lanyard to be used when high voltage electricity is a concern.
- Kevlar® heat resistant thread
- Shoxx energy absorber with flame retardant cover

FEATURES

USER WEIGHT	<100 KG
-------------	---------

EN355
EN354
ASTM F887 (ARC FLASH TEST)

MATERIAL

METAL PARTS	Dielectric
-------------	------------

WEBBING	KEVLAR®/NOMEX® heat resistant webbing
---------	---------------------------------------



FS521R-AB**EDGE TESTED - LANYARD WITH ENERGY ABSORBER**

SIZE	1,5 M	2,0 M
WEIGHT	1,062 KG	1,541 KG
EAN	5605423753806	5605423753776

- Shoxx energy absorber limits force to 6kN, marked with Edge Tested Icon
- Edge tested against steel bar edge radius 0,5mm with no burs, only to be used with similar edges


FEATURES

USER WEIGHT <100 KG

EN355
EN354
CNB/P/11.074 (EDGE TEST)**MATERIAL**

METAL PARTS Aluminium

ROPE Professional 12 mm Kernmantel

**FS522R-AB****EDGE TESTED - DOUBLE LANYARD WITH ENERGY ABSORBER**

SIZE	1,5 M	2,0 M
WEIGHT	1,595 KG	2,252 KG
EAN	5605423753783	5605423753790

- Shoxx energy absorber limits force to 6kN, marked with Edge Tested Icon
- Edge tested against steel bar edge radius 0,5mm with no burs, only to be used with similar edges

FEATURES

USER WEIGHT <100 KG

EN355
EN354
CNB/P/11.074 (EDGE TEST)**MATERIAL**

METAL PARTS Aluminium

ROPE Professional 12 mm Kernmantel



FS506

ENERGY ABSORBER

BASIC



WEIGHT	0,50 KG
EAN	5605423753363

- Reduces the forces below 6kN in case of a fall
- For use in lanyards without absorber
- 2 textile eyelets to fit optional connectors

FEATURES

USER WEIGHT	<100 KG
-------------	---------



EN355

MATERIAL

WEBBING	Basic PES 44mm
---------	----------------



FS510-LN

CHIMANGO 2 LANYARD WITH ENERGY ABSORBER

BASIC



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,24 KG	0,36 KG	0,48 KG
EAN	5605423700848	5605423700770	5605423700701

FEATURES

USER WEIGHT	<100 KG
-------------	---------

EN354
EN355

MATERIAL

METAL PARTS	Steel
-------------	-------

WEBBING	Basic PES 25mm
---------	----------------



FS516-LN

CHIMANGO 2 DOUBLE LANYARD WITH ENERGY ABSORBER

BASIC



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,29 KG	0,43 KG	0,57 KG
EAN	5605423700855	5605423700763	5605423700961

FEATURES

USER WEIGHT	<100 KG
-------------	---------

EN355
EN354

MATERIAL

METAL PARTS	Steel
-------------	-------

WEBBING	Basic PES 25mm
---------	----------------





FS519-LN

CHIMANGO 4 LANYARD WITH ENERGY ABSORBER

BASIC

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,26 KG	0,39 KG	0,52 KG
EAN	5605423701036	5605423700794	5605423753875

FEATURES

USER WEIGHT <100 KG

EN355
EN354

MATERIAL

METAL PARTS Steel

ROPE Basic 11mm Kernmantel



FS550-LN

CHIMANGO 5 DOUBLE LANYARD WITH ENERGY ABSORBER

BASIC

SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	1,0 KG	1,20 KG	1,40 KG
EAN	5605423701142	5605423700817	5605423701159

FEATURES

USER WEIGHT <100 KG

EN355
EN354

MATERIAL

METAL PARTS Steel

ROPE Basic 11mm Kernmantel



FS032-LN**JYNX 4 LANYARD WEBBING**

BASIC



SIZE	1,0 M	1,5 M
WEIGHT	0,09 KG	0,13 KG
EAN	5605423731057	5605423730807

FEATURES

USER WEIGHT <100 KG



EN354

MATERIAL

METAL PARTS Steel

WEBBING Basic PES 25mm

**FS038-LN****JYNX 5 DOUBLE LANYARD WEBBING**

BASIC



SIZE	1,0 M	1,5 M	2,0 M
WEIGHT	0,16 KG	0,24 KG	0,32 KG
EAN	5605423731255	5605423731248	5605423731262

FEATURES

USER WEIGHT <100 KG



EN354

MATERIAL

METAL PARTS Steel

WEBBING Basic PES 25mm



FS030

JYNX 1 ADJUSTABLE LANYARD ROPE

BASIC



SIZE 1,3 M - 2,0 M

WEIGHT 0,40 KG

EAN 5605423800821

- Adjustable length with 8-ring adjuster
- High proportion of sheath to cover ratio which provides improved abrasion protection

FEATURES

USER WEIGHT <100 KG



EN354

MATERIAL

METAL PARTS Steel

ROPE Basic 11 mm Kernmantel



FS087-LN

JYNX 3 DOUBLE LANYARD ROPE

BASIC



SIZE 1,0 M 1,5 M 1,5 M

WEIGHT 0,30 KG 0,40 KG 0,50 KG

EAN 5605423731668 5605423731651 5605423731675

FEATURES

USER WEIGHT <100 KG



EN354

MATERIAL

METAL PARTS Steel

ROPE Basic 11 mm Kernmantel





100 CONZ

FS829 ALUMINIUM ALLOY



PROFESSIONAL

STRENGTH	22 kN
WEIGHT	0,171 KG
OPENING	45 MM
CLOSURE	Auto-twist lock
MATERIAL	Aluminium
EAN	5605423400052
CE	EN362 CLASS B EN12275 CLASS B



FS820 ALUMINIUM ALLOY



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,078 KG
OPENING	19 MM
CLOSURE	Screw lock
MATERIAL	Aluminium
EAN	5605423400106
CE	EN362 CLASS B EN12275 CLASS B



FS33547-3L ALUMINIUM ALLOY



PROFESSIONAL

STRENGTH	23 kN
WEIGHT	0,115 KG
OPENING	23 MM
CLOSURE	Triple twist lock
MATERIAL	Aluminium
EAN	5605423640960
CE	EN362 CLASS B



FS33555-3L ALUMINIUM ALLOY



PROFESSIONAL

STRENGTH	20KN 3-WAY/13KN GATE
WEIGHT	0,096 KG
OPENING	19 MM
CLOSURE	Auto twist lock
MATERIAL	Aluminium
EAN	5605423641035
CE	EN362 CLASS B



FS823 ALUMINIUM ALLOY



PROFESSIONAL

STRENGTH	22 kN
WEIGHT	0,074 KG
OPENING	21 MM
CLOSURE	Auto-twist lock
MATERIAL	Aluminium
EAN	5605423820331
CE	EN362 CLASS B EN12275 CLASS B



FS821 ALUMINIUM HOOK



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,471 KG
OPENING	60 MM
CLOSURE	Auto lock
MATERIAL	Aluminium
EAN	5605423400007
CE	EN362 CLASS A



FS33562 ALUMINIUM HOOK



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,121 KG
OPENING	22 MM
CLOSURE	Auto lock
MATERIAL	Aluminium
EAN	5605423820386
CE	EN362 CLASS T



FS802QL LARGE OPENING MAILLON



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,063 KG
OPENING	16 MM
CLOSURE	Screw lock
MATERIAL	Steel
EAN	5605423400144
CE	EN362 CLASS Q EN12275 CLASS Q



FS831 ALUMINIUM HOOK



PROFESSIONAL

STRENGTH	28 kN
WEIGHT	0,097 KG
OPENING	115 MM
CLOSURE	Auto lock
MATERIAL	Aluminium
EAN	5605423400014
CE	EN362 CLASS A/T



FS893 HALF MOON MAILLON



PROFESSIONAL

STRENGTH	45 kN
WEIGHT	0,149 KG
OPENING	10 MM
CLOSURE	Screw lock
MATERIAL	Steel
EAN	5605423349993
CE	EN362 CLASS Q EN12275 CLASS Q



FS33561

QUICK LINK TRIANGULAR



PROFESSIONAL

STRENGTH	27,5 kN
WEIGHT	0,088 KG
OPENING	10 MM
CLOSURE	Screw lock
MATERIAL	Aluminium
EAN	5605423820782
CE	EN362 CLASS Q EN12275 CLASS Q



FS894 STANDARD MAILLON



PROFESSIONAL

STRENGTH	35 kN
WEIGHT	0,079 KG
OPENING	11 MM
CLOSURE	Screw lock
MATERIAL	Steel
EAN	5605423450552
CE	EN362 CLASS Q EN12275 CLASS Q



FS33500-2L
ZINC-PLATED STEEL
OVAL



BASIC

STRENGTH	30 kN
WEIGHT	0,22 KG
OPENING	19 MM
CLOSURE	Auto twist lock
MATERIAL	Steel
EAN	5605423640274
CE	EN362 CLASS B EN12275 CLASS B



FS802
ZINC-PLATED STEEL
OVAL



BASIC

STRENGTH	25 kN
WEIGHT	0,16 KG
OPENING	18 MM
CLOSURE	Screw lock
MATERIAL	Steel
EAN	5605423400113
CE	EN362 CLASS B EN12275 CLASS H



FS825
ZINC PLATED SNAP
HOOK



BASIC

STRENGTH	23 kN
WEIGHT	0,22 KG
OPENING	21 MM
CLOSURE	Auto lock
MATERIAL	Steel
EAN	5605423400069
CE	EN362 CLASS T EN12275 CLASS D



FS836
ZINC PLATED LARGE
SNAP HOOK



BASIC

STRENGTH	23 kN
WEIGHT	0,86 KG
OPENING	85 MM
CLOSURE	Screw lock
MATERIAL	Steel
EAN	5605423400229
CE	EN362 CLASS A




FS843
ZINC PLATED PIPE
HOOK



BASIC

STRENGTH	22 kN
WEIGHT	0,48 KG
OPENING	52 MM
CLOSURE	Auto lock
MATERIAL	Steel
EAN	5605423400168
CE	EN362 CLASS A



CONNECTION ELEMENTS

Prevent the rope twists when the load turns on itself. Anchor multipliers allow you to organize your working place, while increasing mooring possibilities.

FS33351

4-SLOT ANCHOR PLATE

PROFESSIONAL

- Safe system
- Simple and polyvalent
- Light alloy hot forged
- Indispensable for rope access

FEATURES

MATERIAL Aluminium

WEIGHT 0,08 KG

CE

CNB/P/11.114 REVISION 2



STRENGTH 36 kN

EAN 5605423640250



FS33352

8-SLOT ANCHOR PLATE

PROFESSIONAL

- Safe system
- Simple and polyvalent
- Light alloy aluminium
- Indispensable for rope access

FEATURES

MATERIAL Aluminium

WEIGHT 0,16 KG

CE

CNB/P/11.114 REVISION 2



STRENGTH 50 kN

EAN 5605423640267



FS33370

SWIVEL MOUNTED ON BALL BEARINGS

PROFESSIONAL

- Avoids rope twisting if the load rotates along the axis
- Simple and polyvalent
- Light alloy aluminium
- Indispensable for rope access

FEATURES

MATERIAL Aluminium

WEIGHT 0,17 KG

CE

EN354



STRENGTH 40 kN

EAN 5605423640892



DESCENDERS



FS33360 FIGURE-8 MANUAL

- Rescue and Evacuation
- Safe system



PROFESSIONAL

STRENGTH	35 kN
WEIGHT	0,130 KG
MATERIAL	Aluminium
EAN	5605423640106
CE	EN15151-2 TYPE 2A



FS33361 FIGURE-8 ADVANCE

- Rescue and Evacuation
- Safe system



PROFESSIONAL

STRENGTH	40 kN
WEIGHT	0,240 KG
MATERIAL	Aluminium
EAN	5605423640885
CE	EN15151-2 TYPE 2



FS33300 DSD PLUS BLACK

- Double stop descender
- Rated load min. 30-160 KG, max. 200 KG



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,465 KG
MATERIAL	Aluminium
EAN	5605423640076
CE	EN341 CLASS 2 A EN12841 TYPE C ANSI Z359.4



FS33381 LORY SAFE

- Rescue works or rope access as part of the security/backup system
- Maximum rated load 225 KG
- For use with rope: 8-13 MM



PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,370 KG
MATERIAL	Aluminium
EAN	5605423640908
CE	EN341 CLASS 2A EN12841 TYPE C EN795



FS33344 SPARROW 200R

- Self breaking descender
- Rope adjustment device
- To be used only with static and semi static ropes certified to EN1891 type A
- Maximum rated load 200kg



PROFESSIONAL

WEIGHT	0,592 KG
WORK LOAD	200 KG
MATERIAL	Aluminium
EAN	5605423820737
CE	EN12841 TYPE C EN341 CLASS 2A



DESCENDERS

Recommended to use with

FSR01 MAMBA NEGRA
11 MM ROPE





ROPE CLAMPS AND ROPE GRABS

FS33330/FS33331 ONYX - PRO HAND ROPE CLAMP PROFESSIONAL

REF.	FS33330	FS33331
WEIGHT	0,172 KG	0,172 KG
EAN	5605423640113	5605423640120

- Ergonomic rubber handle anti hand slipping, with anti-jamming release system
- Max. rated load: 100 KG
- For use with rope: 8-13mm

FEATURES

MATERIAL Aluminium

CE EN567



FS33320 GABBRO - ROPE GRAB PROFESSIONAL

WEIGHT	0,166 KG
EAN	5605423640878

- Light and compact all-in-one fall arrester: rope adjuster, rope tool
- Max. rated load: 100 KG
- Recommended rope: FSR01, FS630

FEATURES

MATERIAL Aluminium

CE EN358
EN353-2

FS33340 EASY SPEED - ROPE GRAB PROFESSIONAL

WEIGHT	0,19 KG
EAN	5605423640991

- Light and compact all-in-one fall arrester: rope adjuster, rope tool and ascender
- Developed to grip also on dirty or icy ropes
- Max. rated load: 120 KG
- Recommended rope: FSR01, FS630

FEATURES

MATERIAL Aluminium

CE EN353-2
EN12841 CLASS A/B

FS841 ROPE GRAB BASIC

WEIGHT	0,57 KG
EAN	5605423753424

- Rope grab for rope 14 MM

FEATURES

MATERIAL Steel

CE EN353-2



PULEY SYSTEMS



FS33405

ALLOY PULLEY - 1 ROPE

PROFESSIONAL

STRENGTH	55 kN
WEIGHT	0,244 KG
EAN	5605423640212

- Oscillating side plates
- Twin sheaves mounted on ball bearings
- Up to 3 connectors can be hooked in the large eyelet plus 1 connector on the smaller eyelet
- For use with ropes $\varnothing \leq 13$ mm

FEATURES

MATERIAL Aluminium



EN12278



FS33400

MICRO ALLOY - PULLEY

PROFESSIONAL

STRENGTH	30 kN
WEIGHT	0,10 KG
EAN	5605423640168

- Oscillating side plates
- Sheave mounted on self-lubricating bushings
- For use with ropes $\varnothing \leq 13$ mm

FEATURES

MATERIAL Aluminium



EN12278

FS33341

ALLOY - PULLEY

PROFESSIONAL

STRENGTH	50 kN
WEIGHT	0,361 KG
EAN	5605423820324

- Light, strong and versatile
- Sheaves mounted with 4 ball bearings
- For use with ropes $\varnothing \leq 13$ mm
- Up to 3 connectors can be hooked in the lower eyelet

FEATURES

MATERIAL Aluminium



EN12278



FS33403

DUETTO - PULLEY

PROFESSIONAL

STRENGTH	25 kN
WEIGHT	0,313 KG
EAN	5605423640199

- Versatile and compact light alloy pulley with mobile flanges
- Features additional attachment point. Up to 3 karabiners in the upper eyelet and 1 in the lower eyelet
- For use with ropes $\varnothing \leq 13$ mm

FEATURES

MATERIAL Aluminium



EN12278





ANCHORAGES

FS881

EXPAND ANCHOR

PROFESSIONAL

WEIGHT 0,223 KG

EAN 5605423610130

- Used exclusively for fall protection
- Expander bolt 20mm can be placed in horizontal surfaces; vertical surfaces; overhead/ceiling surfaces
- Portable anchorage for concrete

FEATURES

MAX. LOAD 140 KG

EN795 CLASS B

CE

ANSI Z359.1

ANSI Z359.7

OHSA 1926.502



FS883

TOGGLE ANCHOR

PROFESSIONAL

WEIGHT 0,232 KG

EAN 5605423820348

- Used exclusively for fall protection
- Toggle lock can be placed in: horizontal surfaces; vertical surfaces; overhead/ceiling surfaces
- Portable anchorage for steel/concrete

FEATURES

MAX. LOAD 140 KG

EN795 CLASS B

CE

ANSI Z359.1

ANSI Z359.7

OHSA 1926.502



FS803

FILUM - ANCHOR WIRE

PROFESSIONAL

SIZE 1,0 M 2,0 M 3,0 M

WEIGHT 0,580 KG 1,160 KG 1,740 KG

EAN 5605423420401 5605423420258 5605423420241

- 8 mm galvanized steel wire with protective plastic surface
- For temporary and portable fall arrest attachment.
- FS802 Steel karabiner

FEATURES

MAX. LOAD 120 KG

+ AVAILABLE SIZES 0,5M; 1,5M; 4M

MATERIAL Galvanized steel wire

CE

EN795 CLASS B



FS861**FIXED BEAM ANCHOR**

PROFESSIONAL

WEIGHT	3,400 KG
SIZE	Fits beam 63,50 - 457 MM
EAN	5605423349986

- High strength alloy
- Fits steel beams
- Center positioning retainer prevents jamming on beam

FEATURES

USER WEIGHT 140 KG, 1 PERSON USE



EN795 CLASS B

**FS874****BEAM RUNNER**

PROFESSIONAL

WEIGHT	3,38 KG
SIZE	Fits beam 63,50 - 457 MM
EAN	5605423820539

- Alluminium alloy
- Perfect for overhead

FEATURES

USER WEIGHT 140 KG, 1 PERSON USE



EN795 CLASS B

**FS860****GLIDING BEAM ANCHOR**

PROFESSIONAL

WEIGHT	2,500 KG
SIZE	Fits beam 63,50 - 457 MM 38MM thickness
EAN	5605423400199

- High strength alloy
- Center positioning retainer prevents jamming on beam

FEATURES

USER WEIGHT 140 KG, 1 PERSON USE



EN795 CLASS B

**FS701****PERMANENT ANCHOR**

PROFESSIONAL

WEIGHT	0,067 KG
EAN	5605423420012

- Easy to install, for 1 person use
- Use with 12x110mm AISI 316L stainless steel anchor bolts w/ a single high adhesion expansion element or equivalent
- Permanent fall arrest point

FEATURES

STRENGTH 25 kN

MATERIAL Stainless steel



EN795 CLASS A

SOLD IN
10 UNITS
PACK

FS-LDV-029

ROTA - ANCHOR POINT

PROFESSIONAL

WEIGHT	0,29 KG
EAN	5605423751192

- Rotates to support fall arrest loads in a optimal way
- Suitable for both indoor and outdoor
- 1 person use
- Fall indicator included
- Use with M12 threaded bar and bolt stainless steel and follow instructions for material in structure

FEATURES

STRENGTH	25 kN
MATERIAL	Stainless steel

CE

EN795 CLASS A



FS703

2-ANCHOR - ANCHOR POINT

PROFESSIONAL

WEIGHT	0,370 KG
EAN	5605423420388

- Easy to install
- 1 to 2 persons use
- Suitable both indoors or outdoors
- May be used with portable lifeline system
- Use with M12 threaded bars and bolts stainless steel and follow instructions for material in structure

FEATURES

MATERIAL	Aluminium
CE	EN795 CLASS A CEN/TS16415



FS704

ROOF ANCHOR - ANCHOR POINT


PROFESSIONAL

WEIGHT	0,403 KG
EAN	5605423420395

- 1 person use
- Suitable outdoors for roof applications
- Use with M12 threaded bars and bolts stainless steel and follow instructions for material in structure
- Undertile roof anchor device
- Used on sloping tiled roofs and it's able to adapt to all types of tiles
- The shape and size compatible with roof laying methods and the anchor point is easily reached

FEATURES

MATERIAL	Stainless steel
CE	EN795 CLASS A

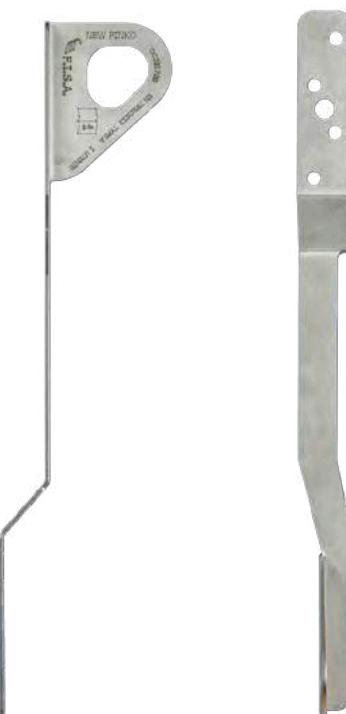

Other sizes than the presented
on request

FS801

STATIO - ANCHOR STROP

PROFESSIONAL



SIZE	1,0 M	2,0 M	3,0 M
WEIGHT	0,304 KG	0,668 KG	1,020 KG
EAN	5605423420043	5605423420050	5605423420302

FEATURES

STRENGTH 22 kN

METAL PARTS Aluminium

WEBBING 45 mm Heavy-duty polyester webbing



EN795 CLASS B



FS808

STO - ANCHOR SLING

PROFESSIONAL



SIZE	0,3 M	0,8 M	1,5 M
WEIGHT	0,011 KG	0,061 KG	0,076 KG
EAN	5605423753868	5605423753837	5605423753844

- High abrasion resistant
- Stitch color scheme for easy identification

FEATURES

STRENGTH 22 kN

+ AVAILABLE SIZES 0,6M; 1,20M

METAL PARTS Aluminium

WEBBING Dyneema® cut resistant webbing



EN795 CLASS B



FS800

ANCHOR SLING

BASIC



SIZE	1 M	1,5 M	2 M
WEIGHT	0,110 KG	0,140 KG	0,226 KG
EAN	5605423420029	5605423820799	5605423420036

FEATURES

STRENGTH 20 kN

+ AVAILABLE SIZES 3M; 4M; 5M; 6M

WEBBING Round Sling 25 MM webbing strap



EN795 CLASS B





FS804

SAFEWALK - PORTABLE
LIFELINE SYSTEM

PROFESSIONAL

SIZE	5 M	10 M	20 M
WEIGHT	1,200 KG	2,300 KG	4,600 KG
EAN	5605423420128	5605423420081	5605423420098

- Portable horizontal lifeline
- It allows the user to adjust the length desired to a maximum of 20 M, with an easy to use web tensioner
- 2 anchor strops to fix on the work structure
- 2 person use approved
- 2 pcs karabiners included
- Secures side movements
- Includes bag

FEATURES

METAL PARTS	Steel
WEBBING	44 mm webbing



EN795:1996 CLASS B (2 PERSON USE)



FS2300

TELESCOPIC POLE

PROFESSIONAL

WEIGHT	3,80 KG
EAN	5605423801040

- For connecting to an out of reach anchorage point
- With a minimum of 2 m to 8 m
- Length can be adjusted through locking latches

FEATURES

LENGTH	2 M to 8 M
MATERIAL	Fiberglass



FS830

ALUMINIUM SNAP HOOK

PROFESSIONAL

WEIGHT	0,49 KG
EAN	5605423801248

- With an attachment ring for telescopic pole

FEATURES

CLOSURE	Double action/ Self locking
MIN. BREAKING STRENGTH	20 kN
MATERIAL	Aluminium



ANCHOR LINES





FS600

GRAB-ON ANCHOR LINE

PROFESSIONAL

SIZE	5 M	10 M	20 M
WEIGHT	0,80 KG	0,90 KG	1,40 KG
EAN	5605423320008	5605423320015	5605423320039

- Grab-on stainless steel fall arrester with automatic locking
- 1 karabiner with 18mm opening to connect into anchor point on structure and other to connect to front chest attachment or dorsal attachment on full body harness, fall protection vest or fall protection overall
- 20cm extension strop for easier use
- Sewn ends protected by plastic sheath

FEATURES

USER WEIGHT	<100 KG
+ SIZES AVAILABLE	15M; 25M; 30M; 35M; 40M; 50M; 60M; 65M; 70M; 75M; 80M; 100M



EN353-2

MATERIAL

METAL PARTS	Aluminium
ROPE	Professional 11 mm Kernmantel



FS630

PURE ANCHOR LINE

PROFESSIONAL



SIZE	5 M	10 M	20 M
WEIGHT	0,539 KG	1,454 KG	3,284 KG
EAN	5605423320244	5605423320251	5605423320275

- 1 Karabiner with double action lock and 20mm opening
- Sewn ends protected by plastic sheath
- Combine with FS33344, FS33300, FS33381 descenders
- Combine with FS32320, FS33340 rope grabs

FEATURES

USER WEIGHT	<100 KG
+ SIZES AVAILABLE	15M; 25M; 30M; 35M; 40M; 45M; 50M; 55M; 60M; 65M; 70M; 75M



EN353-2

MATERIAL

METAL PARTS	Aluminium
ROPE	Professional 11 mm Kernmantel



FS735

ROOFWALKER ANCHOR LINE



SIZE	5 M	10 M	20M
WEIGHT	2,475 KG	5,141 KG	10,875 KG
EAN	5605423610055	5605423610062	5605423610086

- ENDURO™ device one-hand length adjuster in light aluminium
- Shocks energy absorber limits force to 6 kN, marked with Sharp Edge Tested
- Edge tested against steel bar edge radius 0,5 mm with no burs, only to be used with similar edges
- Sewn ends protected by plastic sheath
- Recommended combination with harness FS221 Roofwalker

FEATURES

USER WEIGHT <100 KG

+ SIZES AVAILABLE 25M



EN353-2
CNB/P/11.075

MATERIAL

METAL PARTS Aluminium

ROPE Professional 12 mm Kernmantel



FS602

EDGE TESTED - ANCHOR LINE



SIZE	5 M	10 M	20 M
WEIGHT	0,786 KG	1,948 KG	4,087 KG
EAN	5605423321135	5605423320947	5605423320923

- Shoxx energy absorber limits force to 6kN, marked with Edge tested Icon
- Edge tested against steel bar edge radius 0,5 mm

FEATURES

USER WEIGHT <100 KG

+ SIZES AVAILABLE 15M; 25M; 30M; 35M; 40M; 45M; 50M; 55M; 60M; 65M



EN353-2
CNB/P/11.074 (EDGE TEST)

MATERIAL

METAL PARTS Aluminium

ROPE Professional 12 mm Kernmantel





FS650

BRANTA ANCHOR LINE

BASIC

SIZE	10 M	20 M	30 M
WEIGHT	0,744 KG	3,304 KG	5,864 KG
EAN	5605423753370	5605423753394	5605423754094

- Combine with FALL SAFE® FS841 Rope Grab
- Anchor line is supplied without karabiner

FEATURES

USER WEIGHT <100 KG

+ SIZES AVAILABLE 25M; 50M



EN353-2

MATERIAL

ROPE 14mm polyester - 3-strand rope



FS670

BRANTA 1 ANCHOR LINE

BASIC



SIZE	10 M	20 M	30 M
WEIGHT	3,102 KG	6,204 KG	9,306 KG
EAN	5605423753431	5605423753455	5605423754100

- Stainless steel fall arrester with absorber and automatic locking rope grab
- Rope grab moves very easy with user, locks immediately at fall
- Rope core and sheath in polyamide with breaking strength 26000 N
- Incorporated energy absorber limits arrest force below 6 kN
- Anchor line is supplied without karabiners
- FS670 anchor lines needs 2pcs karabiners

FEATURES

USER WEIGHT <100 KG

+ SIZES AVAILABLE 25M; 50M



EN353-2

MATERIAL

METAL PARTS Steel

ROPE Basic 11 mm Kernmantel





GLOVES
AND
HELMETS

ORBIT HELMET SERIES

FS3050/ FS3054

PROFESSIONAL

REF.	WEIGHT	SIZE	COLOUR	EAN
FS3050	0,38 KG	51-62 CM	○	5605423500011
FS3054	0,38 KG	51-62 CM	●	5605423500028


- Effective protection from falling objects, bumps or falls
- Attractive and functional 3D design with available accessories as visor, ear muffs and headlamps
- Super lightweight, fresh air cooling system
- 10 point silver mesh ventilation system, 4 point Nylon® webbing suspension, chin strap with ITW safety buckle, precise and quick screw lock size adjustment system, hair port design for ponytails
- Accessories: Visor, ear muffs (2 slots), headlamp (4 headlamp clips), exchangeable comfort paddings

FEATURES

MATERIAL	Shell in ABS/PP, Nylon® chin strap and ITW® safety buckle
----------	---



EN397



DYNAMO HELMET SERIES

FS3010/ FS3012/ FS3013/ FS3014/ FS3017

PROFESSIONAL

REF.	WEIGHT	SIZE	COLOUR	EAN
FS3010	0,35 KG	55-63 CM	○	5605423501148
FS3012	0,35 KG	55-63 CM	●	5605423501162
FS3013	0,35 KG	55-63 CM	■	5605423501179
FS3014	0,35 KG	55-63 CM	●	5605423512489
FS3017	0,35 KG	55-63 CM	●	5605423502565

- UP/DOWN adjustable size system
- Quick release buckle
- Adjustable and removable chinstrap; removable and washable headband
- Slots for ear protectors (quick fixing/release system) - works with 3M™ Peltor™
- Rear adjustable size system
- Headlamp clips
- Visors and accessories available on request

FEATURES

MATERIAL	<ul style="list-style-type: none"> • External shell: advanced thermo material (ABS) • Inner shell: polystyrene (EPS)
----------	--



EN397



DYNAMO VOLT HELMET SERIES

FS3030/ FS3031/ FS3032/ FS3033/ FS3034/ FS3035/ FS3036/ FS3037

PROFESSIONAL

REF.	WEIGHT	SIZE	COLOUR	EAN
FS3030	0,39 KG	55-63 CM	○	5605423500172
FS3031	0,39 KG	55-63 CM	●	5605423514780
FS3032	0,39 KG	55-63 CM	●	5605423514797
FS3033	0,39 KG	55-63 CM	■	5605423500196
FS3034	0,39 KG	55-63 CM	●	5605423500158
FS3035	0,39 KG	55-63 CM	●	5605423517255
FS3036	0,39 KG	55-63 CM	●	5605423517231
FS3037	0,39 KG	55-63 CM	●	5605423517835

- UP/DOWN adjustable size system
- Quick release buckle
- Adjustable and removable chinstrap; removable and washable headband
- Slots for ear protectors (quick fixing/release system) - works with 3M™ Peltor™
- Rear adjustable size system
- Headlamp clips
- Visors and accessories available on request
- Electrical isolation 1000 V


FEATURES

MATERIAL	<ul style="list-style-type: none"> • External shell: advanced thermo material (ABS) • Inner shell: polystyrene (EPS)
----------	--



EN397

EN50365 CLASS 1500 Vdc, 1000 Vac



FORCE SERIES

FS3000/ FS3003/ FS3004

BASIC

REF.	WEIGHT	SIZE	COLOUR	EAN
FS3000	0,5 KG	53-66 CM	○	5605423801187
FS3003	0,5 KG	53-66 CM	●	5605423801194
FS3004	0,5 KG	53-66 CM	●	5605423801200

- Industry safety helmet
- With plastic and polyester cradle
- With 4 adjustment points
- Comfortable rubber chinstrap
- EN397 categorisation, mandatory clauses with optional very low temperature (-30°C)

FEATURES

MATERIAL Plastic and polyester cradle and rubber chinstrap

CE

EN397



FS9306

PRO - GLOVES

PROFESSIONAL

SIZE	S	M	L
WEIGHT	0,052 KG	0,058 KG	0,059 KG
EAN	5605423821093	5605423751499	5605423751482

- Designed to improve the user's performance and make work easier and safer
- Specially adapted to professional workers at height
- Half-finger version makes for finest touch control
- With hook for better organization when not in use, easily attach to harness

FEATURES

- Resistant synthetic leather
- Reinforced Kevlar® palm for greater durability
- Stretch Nylon® fabric in the back for superb comfort
- Velcro closure

+ AVAILABLE SIZES XL; XXL

CE

EN420
EN388



ropes

FSR01

MAMBA NEGRA
STATIC ROPE 11 MM

PROFESSIONAL

STRENGTH	35,6 kN
DIAMETER	11 MM
WEIGHT	82 G/M
MATERIAL	Polyamide
EAN	5605423450057
CE	EN1891 Type A

FSR02

ICY STATIC ROPE
11MM

PROFESSIONAL

STRENGTH	35,6 kN
DIAMETER	11 MM
WEIGHT	82 G/M
MATERIAL	Polyamide
EAN	5605423450101
CE	EN1891 Type A

FSR12

MAMBA NEGRA
STATIC ROPE 12 MM

PROFESSIONAL

STRENGTH	45 kN
DIAMETER	12 MM
WEIGHT	90,3 G/M
MATERIAL	Polyamide
EAN	5605423752366
CE	EN1891 Type A

FSR13

ICY STATIC ROPE
12MM

PROFESSIONAL

STRENGTH	45 kN
DIAMETER	12 MM
WEIGHT	90,3 G/M
MATERIAL	Polyamide
EAN	5605423752373
CE	EN1891 Type A

FSR05

MAMBA NEGRA
STATIC ROPE 10.5 MM

PROFESSIONAL

STRENGTH	30,6 kN
DIAMETER	10,5 MM
WEIGHT	80 G/M
MATERIAL	Polyamide
EAN	5605423820607
CE	EN1891 Type A

FSR06

ICY STATIC ROPE
10.5MM

PROFESSIONAL

STRENGTH	30,6 kN
DIAMETER	10,5 MM
WEIGHT	80 G/M
MATERIAL	Polyamide
EAN	5605423821017
CE	EN1891 Type A

FSR10

MAMBA NEGRA
STATIC ROPE 9 MM

PROFESSIONAL

STRENGTH	26,7 kN
DIAMETER	9 MM
WEIGHT	53,4 G/M
MATERIAL	Polyamide
EAN	5605423800838
CE	EN1891 Type B

FSR11

ICY STATIC ROPE
9MM

PROFESSIONAL

STRENGTH	26,7 kN
DIAMETER	9 MM
WEIGHT	53,4 G/M
MATERIAL	Polyamide
EAN	5605423752359
CE	EN1891 Type B

FS850**SHELL - FLEXIBLE PROTECTION**

- Rope protector
- PVC High resistance
- Velcro closure

FEATURES

WEIGHT 0,06 KG

MATERIAL PVC

SIZE	0,40 M
EAN	5605423820379

**FS852****ROPE PROTECTOR**

- With rollers designed to guide and protect the rope
- Protects from abrasion
- The rope protector can be articulated with the desired number of modules

FEATURES

WEIGHT P/ MODULE 0,3 KG

MATERIAL Steel

REF.	FS852
EAN	5605423452181

**FALL SAFE® ROPES****KEY FEATURES AND BENEFITS**

The highest quality yarns, the stringent quality control process and the high proportion of sheath to cover ratio improves protection from abrasion and reduce sheath slippage.

Our ropes benefits and features:

- Exceed requirements of EN1891
- Both type A and B
- Low stretch kernmantel
- Excellent handling and knot holding characteristics
- High abrasion resistance
- Hard wearing and high strength
- Excellent UV protection
- Max. life span of 10 years
- Compatibility with hardware nylon yarns
- Low extension and low shrinkage strong and durable
- Traceability system
- Low extension during normal working procedure but capacity to withstand forces generated by a fall



CARRYING
BAGS



FS8100**XL - CARRYING BAG**

PROFESSIONAL

CAPACITY	Approx. 60 L
WEIGHT	1,00 KG
EAN	5605423821024

- Dimensions: Approx. 700x400x350mm (LengthxWidthxHeight)
- Wide reinforced opening with multiple pockets
- Multiple ways to carry (backpack or hand-held)
- Resistant to water splashes, do not engulf

FEATURES

MATERIAL Heavy duty TPU

**FS8001****LIFELINE - CARRYING BAG**

PROFESSIONAL

CAPACITY	Approx. 17 L
WEIGHT	0,70 KG
EAN	5605423550009

- Dimensions: Approx. 400x160x280mm (LengthxWidthxHeight)
- Wide reinforced opening
- Easy opening - Velcro closure

FEATURES

MATERIAL Heavy duty TPU coated

**FS8201****PRO - CARRYING BAG**

PROFESSIONAL

CAPACITY	Approx. 55 L
WEIGHT	1,20 KG
EAN	5605423550153

- Dimensions: Approx. 590x290x320mm (LengthxWidthxHeight)
- Reinforced base
- Multiple handles
- 2 side pockets

FEATURES

MATERIAL Heavy duty TPU coated

**FS8207****LITE - GEAR BAG**

PROFESSIONAL

CAPACITY	Approx. 6 L
WEIGHT	0,30 KG
EAN	5605423550313

- Dimensions: Approx. 220x90x330mm (LengthxWidthxHeight)
- To be attached to the harness belt
- Reinforced base and opening
- The button allows to keep it open while working

FEATURES

MATERIAL Heavy duty TPU



FS8214**ROPE CARGO - ROPE BAG**

PROFESSIONAL

CAPACITY	Approx. 25 L	Approx. 40 L	Approx. 60 L
DIMENSIONS	225x225x500 MM	650x650x580 MM	300x300x670MM
WEIGHT	1,0 KG	1,30 KG	1,70 KG
EAN	5605423801156	5605423801163	5605423801170

- Wide reinforced opening with multiple pockets
- Multiple ways to carry (backpack or hand-held)
- Resistant to water splashes, do not engulf
- Multiple closure system, with a pulling string and barrel lock and connect buckles

FEATURES

MATERIAL Heavy duty TPU

**FS8210****LITE ACCESSORY BAG**

PROFESSIONAL

CAPACITY	Approx. 6 L
WEIGHT	0,196 KG
EAN	5605423550375

- Dimensions: Approx. 165x280mm (DiameterxHeight)
- Bag is closed by a pulling string and barrel lock
- Resistant to water splashes, do not engulf

FEATURES

MATERIAL Heavy duty TPU + PVC

**FS8219****BACKPACK ROLL BAG**

PROFESSIONAL

CAPACITY	Approx. 20 L up to 30 L
WEIGHT	0,90 KG
EAN	5605423800845

- Dimensions: Approx. 340x140x450-660mm (LengthxWidthxHeight)
- Multiple ways to close as a multioption roll bag
- Multiple ways to carry (backpack or hand-held)

FEATURES

MATERIAL Heavy duty TPU coated + PES



FS8205

RUCKSACK STANDARD

BASIC

CAPACITY Approx. 20 L

WEIGHT 0,409 KG

EAN 5605423550351

- Dimensions: Approx. 340x150x400mm (LengthxWidthxHeight)
- Backpack bag resistant black
- Includes front pockets, easy access
- Adjustable straps

FEATURES

MATERIAL Heavy duty PES + TPU



FS8150

CARRYING BAG STANDARD

BASIC

CAPACITY Approx. 46 L

WEIGHT 0,398 KG

EAN 5605423809374

- Dimensions: Approx. 480x300x320mm (LengthxWidthxHeight)
- Wide reinforced opening
- Easy opening zipper system

FEATURES

MATERIAL Heavy duty PES



FS8125

CARRYING BAG

PROFESSIONAL

CAPACITY Approx. 13 L

WEIGHT 0,200 KG

EAN 5605423809367

- Dimensions: Approx. 350x200x190mm (LengthxWidthxHeight)
- Wide reinforced opening
- Easy opening zipper system

FEATURES

MATERIAL Heavy duty PES



RESCUE



FS905

SAVEMAN™ ADVANCE
RESCUE EQUIPMENT

PROFESSIONAL



LENGTH	15 M	25 M	50 M
WEIGHT	0,863 KG	1,038 KG	1,475 KG
EAN	5605423430226	5605423430615	5605423430622

- Self rescue or remote rescue of victim
- Small and compact
- Manual descend unit, easy to use, anti-panic function
- Controllable speed up to 2m/s
- Heat and chemical resistant rope
- Inbuilt energy absorber
- Easily connects to harness belt
- Single use only!

FEATURES

MAX USER WEIGHT 125 KG (1 person use)

+ AVAILABLE ON REQUEST LENGTHS 75M; 100M

COMPONENTS

- 2 aluminium karabiner
- 1 PES webbing (25 mm) anchor sling
- 1 vacuum and waterproof compact bag
- 1 rescue knife
- 1 abrasion resistant cover bag

CE EN341 TYPE 2 CLASS D

MATERIAL

METAL PARTS Aluminium, Stainless steel

ROPE Technora® Ø5 MM

FALL SAFE® FS905 Saveman™ Advance is a small and compact rescue descender equipment with anti-panic function. It is easy to carry and install on the harness. For extra safety it incorporates a energy absorber in the device so overload of rope is not possible.

The Technora® rope is the strongest aramid fibre existing and has a very high heat and chemical resistance.



KNIFE TO CUT THE VACCUM BAG



UNIQUE DESIGN AND FUNCTIONALITY

VELCRO CLOSURE ALLOWS A FAST OPENING

WATER RESISTANTE, COMPACT AND EASY TO ATTACH TO THE BELT



TECHNORA® ROPE

VACCUM PACK
INSIDE THE BAG

FS906

2 SAFE - RESCUE EQUIPMENT

PROFESSIONAL



LENGTH	15 M	25 M	40 M
WEIGHT	1,690 KG	2,100 KG	4,507 KG
EAN	5605423430257	5605423800555	5605423430264

- Self rescue or go with the victim
- Small and compact
- Controllable speed up to 2m/s
- Easily connects to harness belt
- Single use only

FEATURES

MAX LOAD 150 KG

+ AVAILABLE ON REQUEST LENGTHS 30M

- 1 aluminium karabiner with catch-free screw lock

COMPONENTS

- 1 PES webbing (25 mm) anchor sling
- 1 vacuum and waterproof compact bag
- 1 rescue knife
- 1 storage bag



EN341 TYPE 2 CLASS D

MATERIAL

METAL PARTS Aluminium, steel

ROPE PA Ø9 MM rope - EN1891, 2215daN



FS900RA

PULLSAFE - RESCUE EQUIPMENT

PROFESSIONAL



LENGTH	10 M	20 M	30 M
WEIGHT	2,750 KG	5,500 KG	8,250 KG
EAN	5605423821062	5605423430370	5605423430332

- Descend device DSD Plus for up to 2 persons
- Go with the victim rescue
- Integrated light weight winch system with ratio 4:1
- Controllable speed up to 2m/s

FEATURES

MAX LOAD 200 KG (up to 2 persons)

+ AVAILABLE ON REQUEST LENGTHS 40M; 50M; 60M

- 3 aluminium hooks with auto lock

COMPONENTS

- 1 DSD Plus Descender
- 1 winch system
- 1 storage bag

EN341 TYPE 2 CLASS A
EN12841 TYPE C

MATERIAL

METAL PARTS Aluminium, steel, stainless steel

ROPE PA Ø11 MM Mamba Negra; PA Ø9 MM Icy White





FS907

EVAK - RESCUE EQUIPMENT

PROFESSIONAL

LENGTH	20 M	50 M	80 M
WEIGHT	2,600 KG	5,500 KG	7,200 KG
EAN	5605423430301	5605423751284	5605423430554

- Remote rescue of victim
- Automatic descend system vacuum sealed with speed 1.5m/s
- Manual lift ascend/descend

FEATURES

MAX USER WEIGHT 140 KG (1 person)

+ AVAILABLE ON REQUEST LENGTHS 100M; 125M; 150M; 200M

COMPONENTS

- 1 BETASTICK
- 1 PES webbing (25 mm) anchor sling
- 1 aluminium karabiner
- 1 storage bag with special compartment for the pole

CE

- EN341 TYPE 1 CLASS A
- EN1496 CLASS A
- ANSI/ASSE Z359-4

MATERIAL

METAL PARTS Aluminium

ROPE PA Ø10.5 MM Kernmantel rope



FS973

AUTO - EVACUATION SYSTEM

PROFESSIONAL



LENGTH	20 M	50 M	80 M
WEIGHT	2,60 KG	5,50 KG	7,20 KG
EAN	5605423430561	5605423800852	5605423752342

- Device with automatic speed regulation (approx. 1,5m/s)
- The brake controlled by centrifugal forces keeps the speed of the device constant during the entire abseiling process
- Resistant to cold, heat, corrosion
- Does not cause undue wear or damage to the rope
- Compact, stable size, low weight

FEATURES

MAX LOAD 140 KG (1 person)

+ AVAILABLE ON REQUEST LENGTHS 100M; 125M; 150M; 200M

COMPONENTS

- 2 personal rescue slings
- 1 PES webbing (25 mm) anchor sling
- 1 storage bag

CE

- EN341 TYPE 1 CLASS A
- ANSI/ASSE Z359.4

MATERIAL

METAL PARTS Aluminium

ROPE PA Ø10.5 MM Kernmantel rope



FS909**RESCUE FIT - RESCUE EQUIPMENT**

PROFESSIONAL

LENGTH	10 M	20 M	30 M
WEIGHT	3,000 KG	5,500 KG	8,250 KG
EAN	5605423800869	5605423800876	5605423800883

- Remote rescue of victim
- Integrated lightweight winch system with ratio 4:1
- Manual lift ascend/descend system

FEATURES

MAX USER WEIGHT 200 KG (1 person)

+ AVAILABLE ON REQUEST LENGTHS 40M; 50M; 60M

- 1 BETASTICK
- 1 winch system
- 1 aluminium hook
- 1 Sparrow 200R descender
- 1 hand rope clamp
- 1 PES webbing (25 mm) anchor sling
- 1 aluminium karabiner
- 1 storage bag with special compartment for the pole



EN341 - CLASS D

MATERIAL

METAL PARTS Aluminium

ROPE PA Ø11 MM Mamba Negra, PA Ø9 MM Icy White

**FS160-200****RONIN - POWERED ROPE ASCENDER**

PROFESSIONAL

SIZE	LENGTH: 260 MM WIDTH: 380 MM HEIGHT: 340 MM
WEIGHT	9,0 KG
EAN	5605423445879

- Lightweight, rugged and durable ascending device with hands free brake
- 3.5 minutes of autonomy continue use w/ 181 kg (152m) or 7 minutes continue use w/ 91kg (305m)
- The most economic rope ascender on the market
- Recharge time of 3-4 hours

FEATURES

MAX LOAD 181 KG

OPERATING TEMPERATURE -15°C to + 57°C (5°F to 134.6°F)

PROTECTION (IP) IP54

ROPE TYPE 9 - 11.7 mm aramid sheath static rope

ASCENT SPEED 38m/min

DESCEND SPEED 60+m/min w/ 181kg

DESCENT METHOD Gravity feed with manual brake

CE DIRECTIVE 2006/42/EC EN ISO12100
DIRECTIVE 2014/30/EU EN 60204-1

MATERIAL

METAL PARTS Aluminium



ADDITIONAL BATTERY
FS160-210

FS806 RESCUE Y-PAD

PROFESSIONAL

SIZE	0,6 M
WEIGHT	0,85 KG
EAN	5605423550191

- Central D-ring with spreader bar
- Combine with FS236
- Aluminium black D-ring, breaking strength min. 22kN
- Webbing breaking strength >29kN

MATERIAL

METAL PARTS Aluminium

WEBBING PES 45 MM



FS236 VERT - RESCUE HARNESS

PROFESSIONAL

SIZE	S/M	L/XL	XXL
WEIGHT	1,476 KG	1,576 KG	1,700 KG
EAN	5605423820140	5605423820133	5605423820164

FEATURES

PADDING	No padding
D-RINGS	1 Dorsal D-ring 1 Front D-ring 2 Shoulder D-rings for rescue from confined spaces
BUCKLES	IZY Quick connect buckle

USER WEIGHT <140 KG

CE EN361
EN1497

MATERIAL

METAL PARTS Aluminium

WEBBING PES HP water repellent



FS800-SP5 STEPS - RESCUE LADDER

PROFESSIONAL

SIZE	2,4 M
WEIGHT	1,52 KG
EAN	5605423270846

- Easy and quick to install, can be used vertical or horizontal
- Connect several for increased length
- Combine with FS853 steps bracket
- 3 karabiners FS33500-2L attach direct to anchor points or to FS853 steps bracket
- Separate fall arrest system must be used in combination with Steps rescue ladder

FEATURES

MAX LOAD 130 KG (1 person)



FS34105**RESCUE STRETCHER KIT SLIX 100****PROFESSIONAL**

WEIGHT	11 KG
EAN	5605423430578

- Robust, compact and lightweight stretcher
- The stretcher may be handled vertically or horizontally
- With vertical and horizontal hauling straps for SLIX 100
- Roll top carrying bag for SLIX 100
- Flexible material combined to a smooth finish allows easy sliding and permits the stretcher to be rolled width ways or lengthways
- No webbing passes under the stretcher preventing damage whilst dragging
- Strong handles around the stretcher allow it to be maneuvered by several rescuers

FEATURES

MAX USER WEIGHT 400 KG

WIDTH 915 MM
LENGTH 2300 MM

CE 93/42/EEC CLASS 1

MATERIAL

STRETCHER	Low Density Polyethylene
WEBBING	Polyester
BUCKLES	Stainless steel

**FS34106****SLIX SPINAL SPLINT FOR STRETCHER SLIX 100****PROFESSIONAL**

WEIGHT	3,40 KG
EAN	5605423432541

- The head pocket and back are padded
- The sides and top of the head pocket are also stiffened for extra protection
- Rotating Velcro™ head closures ensure security and versatility
- All standard cervical collars are compatible
- The lumbar pad is adjustable for position, which combined with the design, allows one size fits all

FEATURES

MAX USER WEIGHT 200 KG

WIDTH 200 MM (head), 440 MM (body)
LENGTH 1020 MM

CE 93/42/EEC CLASS 1

MATERIAL

STRETCHER	Low Density Polyethylene
WEBBING	Polyester
BUCKLES	Stainless steel



FS975 TRIPOD

PROFESSIONAL

WEIGHT	20 KG
EAN	5605423430707

- Provides a safe anchor point for work in confined space, manholes, tanks, hatches and other below work for fall arrest protection
- Telescopic legs and safety chain
- 2pcs integrated cable pulleys
- 2pcs anchor rings
- Rubber feet/ice feet
- Supplied with a PVC carrying bag

FEATURES

MAX. RATED LOAD	150 KG
-----------------	--------

SIZE/HEIGHT	Legs fully open: 2,4 M Legs fully closed: 1,3 M Diameter: 1,14 M - 2,10 M
-------------	---

MATERIAL	Steel and aluminium
----------	---------------------

CE



EN795 - CLASS B



FS976 LOAD WINCH

PROFESSIONAL

WEIGHT	11 KG
EAN	5605423460711

- Includes a bracket to provide connection to the tripod
- Should be used together with the FS975 Tripod
- Shall only be used for rescue purposes
- Auto-brake system

FEATURES

MAX. RATED LOAD	100 KG
-----------------	--------

LENGTH	20 M
--------	------

MATERIAL	Steel
----------	-------

CE



EN1496



FS977 RESCUE WINCH

PROFESSIONAL

WEIGHT	18 KG
EAN	5605423800593

- Shall only be used for rescue purposes
- Includes attachment bracket

FEATURES

METAL PARTS	Galvanized steel
-------------	------------------

MAX. RATED LOAD	100 KG
-----------------	--------

LENGTH	20 M
--------	------

CE

EN360
EN1496 CLASS B



FALL ARREST BLOCKS



FS930 SERIES

FS930-BC | FS930-TB | FS930-TC PROFESSIONAL

SIZE	2 M	2 M	2 M
WEIGHT	1,447 KG	1,400 KG	1,033 KG
EAN	5605423801057	5605423801064	5605423801071

- Rotational swivel
- Fall indicators for safer checks

FEATURES

MAX LOAD 140 KG (1 person use)

EN360

MATERIAL

HOUSING Impact resistant glass filled nylon

CHASSIS Stainless and carbon steel

WEBBING Dyneema® abrasion resistant webbing



FS930 SHARP EDGE SERIES

FS930E-TB | FS930E-BC | FS930E-TC



PROFESSIONAL



SIZE	2 M	2 M	2 M
WEIGHT	1,502 KG	1,552 KG	1,138 KG
EAN	5605423801095	5605423801088	5605423801101

- Rotational swivel
- Fall indicators for safer checks

FEATURES

MAX LOAD 120 KG (1 person use)

EN360
CNB/P/11.060

MATERIAL

HOUSING Impact resistant glass filled nylon

CHASSIS Stainless and carbon steel

WEBBING Dyneema® abrasion resistant webbing



BASIC BLOCKS SERIES

FS933 | FS934 | FS936



BASIC

REFERENCE	FS933	FS934	FS936
SIZE	7,50 M	10 M	15 M
WEIGHT	3,028 KG	4,225 KG	6,618 KG
EAN	5605423460421	5605423460445	5605423460452

- Rotatable swivel on snap hook included to prevent lifeline from twisting
- Resistant to damp, heat, cold, corrosion
- Tested for one person, 136 kg

FEATURES

MAX LOAD 136 KG (1 person use)
TESTED



EN360

MATERIAL

HOUSING High-strength polymer

CABLE 4.5 MM Galvanized steel cable



BASIC BLOCKS SHARP EDGE

FS933E | FS934E | FS936E



PROFESSIONAL

REFERENCE	FS933E	FS934E	FS936E
SIZE	3 M	10 M	15 M
WEIGHT	3,999 KG	5,519 KG	8,559 KG
EAN	5605423460674	5605423460650	5605423460667

- Single person use
- Mobility enhancing swivel-top
- Rugged and durable housing
- Braking system that eases shock in the event of a fall

FEATURES

MAX LOAD 136 KG (1 person use)
TESTED



EN360

CNB/P/11.060

MATERIAL

HOUSING High-strength polymer

CABLE 4.5 MM Galvanized steel cable





FS932

FALL ARREST BLOCK

PROFESSIONAL

SIZE	7 M
WEIGHT	2,10 KG
EAN	5605423800609

- High functional retractable block
- Low weight thanks to the using of extra light plastic
- Tested for one person

FEATURES

MAX LOAD TESTED	136 KG (1 person use)
-----------------	-----------------------

CE	EN360
----	-------

MATERIAL

HOUSING	High-strength polymer
CABLE	Dyneema® cut resistant webbing



FS931 SERIES

FS931-BC | FS931-TB | FS931-TC

PROFESSIONAL



SIZE	3,0 M	3,0 M	3,0 M
WEIGHT	2,516 KG	2,446 KG	1,895 KG
EAN	5605423801118	5605423801132	5605423801125

- Rotational swivel
- Fall indicators for safer checks

FEATURES

MAX LOAD	140 KG (1 person use)
----------	-----------------------

CE	EN360
----	-------

MATERIAL

HOUSING	Impact resistant glass filled nylon
CHASSIS	Stainless and carbon steel
WEBBING	Dyneema® abrasion resistant webbing



FS919

TWIN BRACKET

PROFESSIONAL

WEIGHT	0,131 KG
EAN	5605423000689

FEATURES

MATERIAL	Stainless steel
----------	-----------------





APPAREL

FS7200**FALL SAFE® JACKET****PROFESSIONAL**

SIZE	S/M	L/XL	XXL
EAN	5605423800937	5605423800944	5605423800951

FEATURES

MATERIAL PA 65%, PES 25%, SP 10%

COLOUR

**FS7300****FALL SAFE® PANTS****PROFESSIONAL**

SIZE	S/M	L/XL	XXL
EAN	5605423800968	5605423800975	5605423800982

FEATURES

MATERIAL PA 65%, PES 25%, SP 10%

COLOUR

**FS7400****FALL SAFE® TSHIRT****PROFESSIONAL**

SIZE	S/M	L/XL	XXL
EAN	5605423800999	5605423801019	5605423801026

FEATURES

MATERIAL 100% cotton

COLOUR



THE FALL FACTOR

Fall factor is a rating used to evaluate the danger of specific scenarios when working at heights. Fall Factor is calculated using the following equation:

FALL FACTOR = HEIGHT OF FALL/LENGTH OF LANYARD

In situations where the Fall Factor will be 0 (e.g. the worker is positioned under the anchor point on a tensioned lanyard) or in situations where the Fall Factor is 1 or less and the freedom of movement is limited to 0.6 m or less, positioning equipment is adequate.

Fall arrest equipment must be used for other situations where the Fall Factor is greater than 1 or more freedom of movement is required.

Systems involving Fall Factors include:

Restraint


Technique used to prevent a worker from entering a fall risk area (e.g. positioning harness and lanyard EN 358).

Positioning

Technique used to position a worker securely in a fall risk area without creating a Fall Factor scenario (e.g. hanging beneath an anchor point in a positioning harness on a tensioned lanyard EN 358).

Fall Arrest

Technique used to catch and reduce securely in a fall risk area without creating a Fall Factor scenario (e.g. hanging beneath an anchor point in a positioning harness on a tensioned lanyard EN 358).



FALL ARREST

Mind the following when using Fall Arrest systems:

- Energy absorbing lanyards must not exceed 2 meters in length (including connectors);
- The maximum extended length for the new Energy;
- Absorber has 1,5m;
- The length of a potential fall must always be minimized with the proper gear and rigging;
- The possibility of a worker hitting something during a fall must be eliminated
- Avoid systems that could create a Fall Factor greater than 2
- Calculate the clearance distance below the anchor point to ensure that worker cannot hit the ground:


$$\text{Clearance Distance} = A + B + C + D$$

A - Lanyard length

B - Energy absorber extension

C - Distance between harness attachment and worker's feet, 1,5 m

D - Safe distance from the ground, 1 m

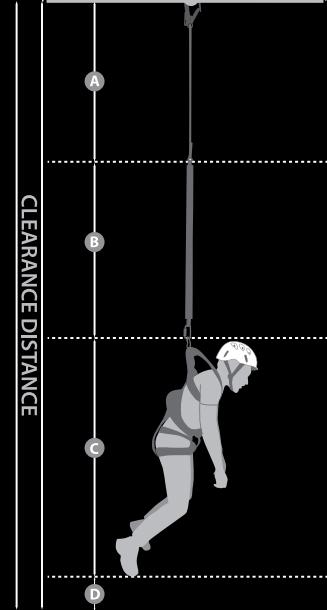

ICON FINDER

Tell us what you do, we'll tell you what you need.

FALL SAFE® develops its products always keeping on mind real life situations and works. So we are guided by our motto **YOUR WORK. OUR SOLUTION.**, that helps us identifying our customers needs and daily risks. You can find one or more of the following icons in any product, which allow you to find exactly what you are looking for.

	Access platforms		Points of adjustment/buckles from 1 to 12
	Arborist		Fall arrest indicator
	Confined spaces		QR Code tag ID INSPECTOR® ready
	Construction		RFID tag ID INSPECTOR® ready
	Offshore		Suitable for extreme environment/ ready for specific situations
	Rescue		Extreme environment: Flames, fire, welding processes
	Riggers		Extreme environment: Tough and dirty spaces, works
	Roof works		Extreme environment: High voltage electricity
	Rope access		Direct air flow through breathable materials
	Scaffolding		Extreme environment: ATEX tested
	Telecom		Tested in a horizontal application over a sharp edge $r \geq 0,5$ mm
	Tower climbing		Heavy weight - tested for 136 KG
	Wind turbine		Heavy weight - tested for 140 KG Appl. to all PRO harnesses
	Wood poles		Risk of death
	10 Colour orange		Attention!
	15 Colour lime		CE Certified
	20 Colour orange high visibility		For occasional use
	30 Colour lime high visibility		For frequent use
	40 Colour orange anti-flame		For intense use
	55 Colour black		

ICON FINDER

Tell us what you do, we'll tell you what you need.

FALL SAFE® develops its products always keeping on mind real life situations and works. So we are guided by our motto **YOUR WORK. OUR SOLUTION.**, that helps us identifying our customers needs and daily risks. You can find one or more of the following icons in any product, which allow you to find exactly what you are looking for.

	Access platforms		Points of adjustment/buckles from 1 to 12
	Arborist		Fall arrest indicator
	Confined spaces		QR Code tag ID INSPECTOR® ready
	Construction		RFID tag ID INSPECTOR® ready
	Offshore		Suitable for extreme environment/ ready for specific situations
	Rescue		Extreme environment: Flames, fire, welding processes
	Riggers		Extreme environment: Tough and dirty spaces, works
	Roof works		Extreme environment: High voltage electricity
	Rope access		Direct air flow through breathable materials
	Scaffolding		Extreme environment: ATEX tested
	Telecom		Tested in a horizontal application over a sharp edge $r \geq 0,5$ mm
	Tower climbing		Heavy weight - tested for 136 KG
	Wind turbine		Heavy weight - tested for 140 KG Appl. to all PRO harnesses
	Wood poles		Risk of death
	10 Colour orange		Attention!
	15 Colour lime		CE Certified
	20 Colour orange high visibility		For occasional use
	30 Colour lime high visibility		For frequent use
	40 Colour orange anti-flame		For intense use
	55 Colour black		

FALL SAFE ON LINE, LDA.

Zona Industrial da Varziela
Rua B - Lote 54
4480-620 Vila do Conde
PORTUGAL

TEL. +351 252 480 060
FAX +351 252 480 069

support@fallsafe-online.com

FALL[®]
SAFE

WWW.FALLSAFE-ONLINE.COM

